




PRODUCT NAME: Bamboo 4 Light Rectangular Chandelier

ITEM NUMBER: LC977

ASSEMBLED DIMENSIONS: 23 3/4"H x 11"W x 11"D

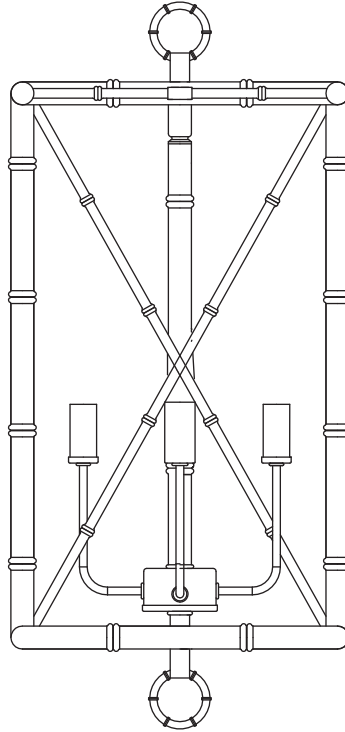

IMPORTANT SAFETY INSTRUCTIONS:

- A licensed professional electrician should install direct wire fixtures.
- For your safety, please read instructions carefully and completely before beginning assembly or installation. If unsure, contact a licensed electrician.
- Fixture must be installed according to applicable code(s) by a person familiar with its construction and operation. If unsure, contact a licensed electrician.
- Fixture rated up to 60 Watt MAX Type B bulbs (not included). LED bulbs recommended.
- Prior to installation or removal of a previous fixture, disconnect power by turning off power at circuit breaker or removing fuse at electrical panel.

WARNING:

- Deviation from assembly instructions may result in risk of fire or electric shock.
- To reduce risk of personal injury, always turn off fixture and allow bulbs to cool prior to replacement.
- Do not touch or look directly at illuminated bulbs.
- Keep flammable material away from illuminated bulbs.

PRODUCTS ARE NOT INTENDED
FOR COMMERCIAL USE.

UPDATED: 4-28 -2023

MADE IN CHINA

Page 1 of 5



Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

Remove all parts, hardware and protective packaging from carton and carefully arrange on a clean, level surface.



Prevent accidentally discarding small parts or hardware. Retain all carton contents until assembly and installation are complete.


Approved Location for Use: Dry Indoor / *Damp Covered Outdoor

* protected from direct weather and not subjected to water saturation.

Assembly Time: 20 Minutes


People Required: One or more

Tools Required: Screwdriver, Wire Strippers, Wire Cutters, Electrical Tape

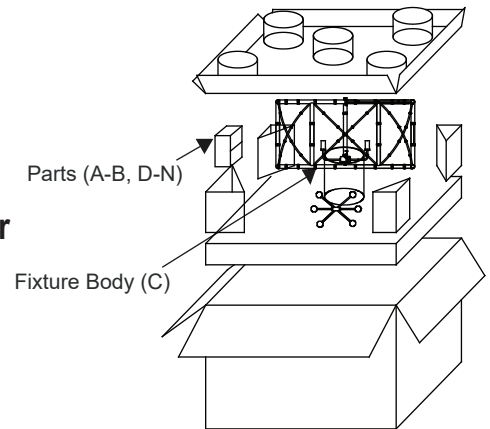

HARDWARE AND COMPONENTS


INCLUDED:




1- Canopy (A)



1- Chain (B)
with attached Lock Buckles

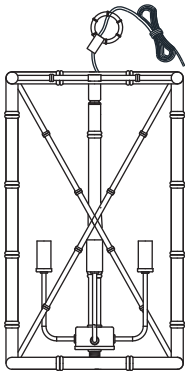


1- Fixture Body (C)



1- Fixture Loop (D)


threaded onto wire on top of Fixture Body



1- Nipple (E)



2- Mounting Screws (F)



3- Wire Connectors (G)



1- Collar (H)




1- Canopy Loop (I)




1- Lock Washer (J)


NOT INCLUDED:




4 - 60 Watt Max
Type B Bulbs
*LED bulbs may be used.



1- Nut (K)



1- Mounting Bracket (L)
with attached Ground Screw



1- Finial (M)



Cleaning and Care

Periodically wipe Fixture with a soft, dry cloth.
Avoid harsh or abrasive chemicals as
finish damage may result.



Customer Service: 800-367-2810
Online: www.ballarddesigns.com




Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

STEP 1: ASSEMBLE FIXTURE

Fixture Loop (D) is threaded onto cord/wire. Carefully unwind and straighten cord then slide Fixture Loop down to threaded nipple on top of Fixture Body (C). Align, turn and fully tighten.


Next, align, turn and tighten Finial (M) onto threaded nipple on bottom of socket cluster on Fixture Body.

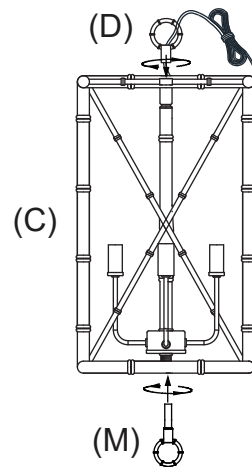

STEP 2: ASSEMBLE MOUNTING HARDWARE


Mounting Hardware typically ships pre-assembled, but if necessary thread Nipple (E) into center hole in Mounting Bracket (L) add Lock Washer (J) and Hex Nut (K) to upper side of Mounting Bracket and tighten to secure.

Finally, thread Canopy Loop (I) on longer end of Nipple.

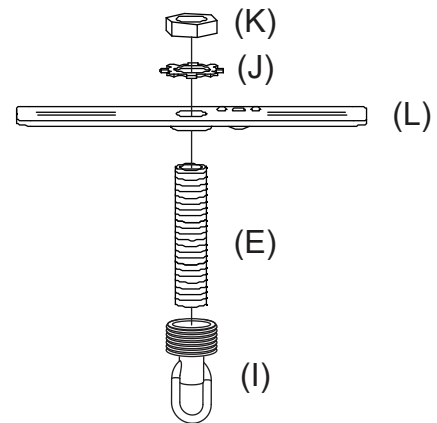

STEP 3: ATTACH MOUNTING HARDWARE

Attach Mounting Hardware to Junction Box using Mounting Screws (F). Use screwdriver to firmly tighten and secure.

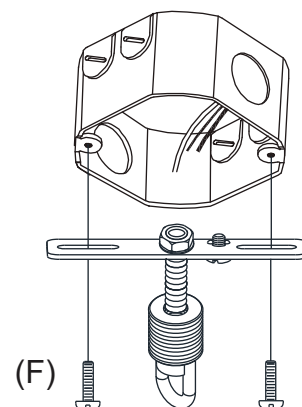




Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

STEP 4: WEAVE CORD/WIRE

Gently thread cord and ground wire through Collar (H) and Canopy (A) then through Chain (B) about every third link.

Next, carefully thread cord and ground wire through hole in Canopy Loop (I) and pull into Junction Box in preparation for electrical connection in next step. Permit cord and wire to hang freely next to Chain.


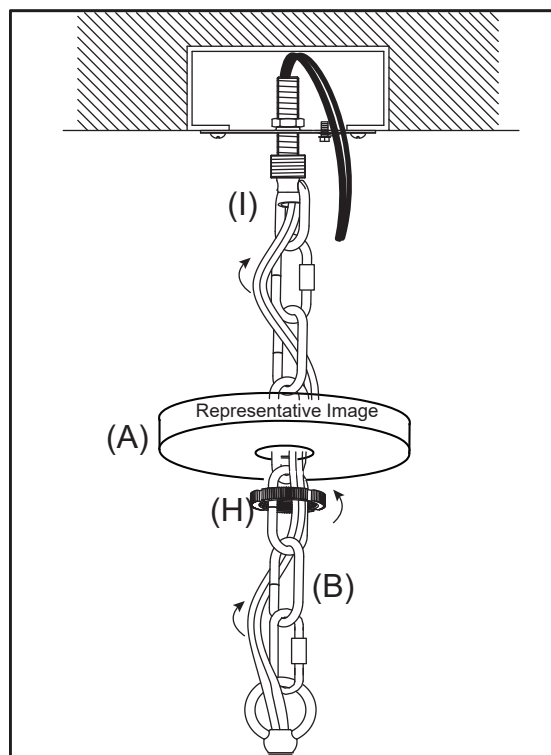


STEP 5: CONNECT ELECTRICAL

Trim wires leaving at least 6" to make electrical connection. Strip ends of 3/4" insulation. Attach bare (or green) ground wire from fixture to bare (or green) ground wire in junction box using Wire Connector (G). Wrap both around green ground screw on Mounting Bracket (L) and firmly tighten.

⚡ TO AVOID ELECTRICAL SHOCK, WIRE FOR CORRECT POLARITY: Connect wires *BLACK to smooth edge wire. Connect wires WHITE to ribbed edge wire. Firmly secure with Wire Connectors. See inset below:

* Black wire may be red in some installations.

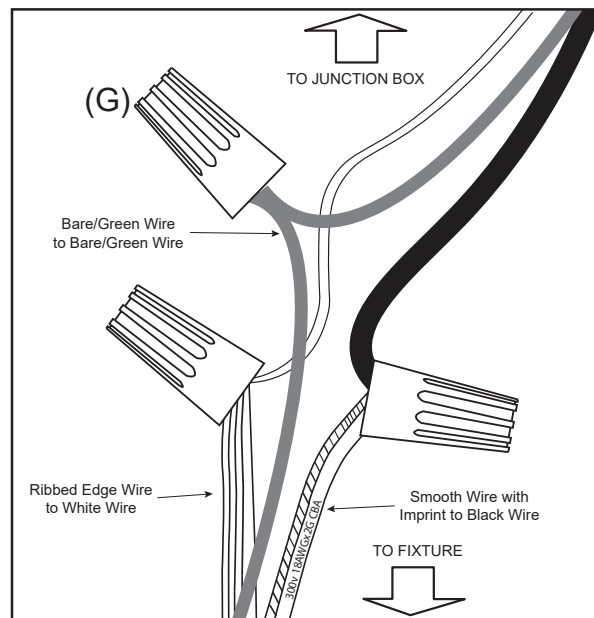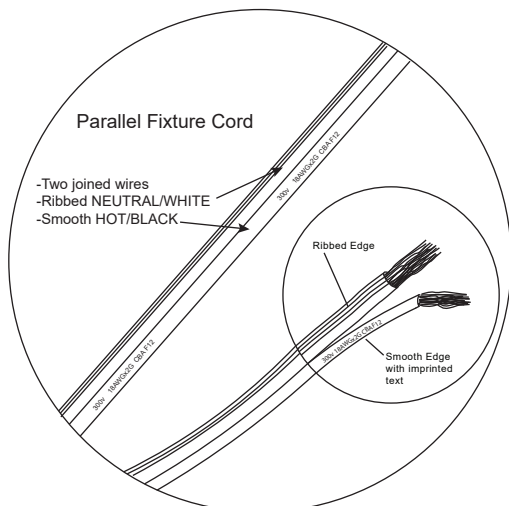


Customer Service: 800-367-2810
Online: www.ballarddesigns.com

Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

STEP 6: COVER JUNCTION BOX

Slide Canopy (A) over Junction Box followed by Collar (H). Thread Collar onto Canopy Loop (I) and tighten until Canopy is firmly pressed against ceiling.

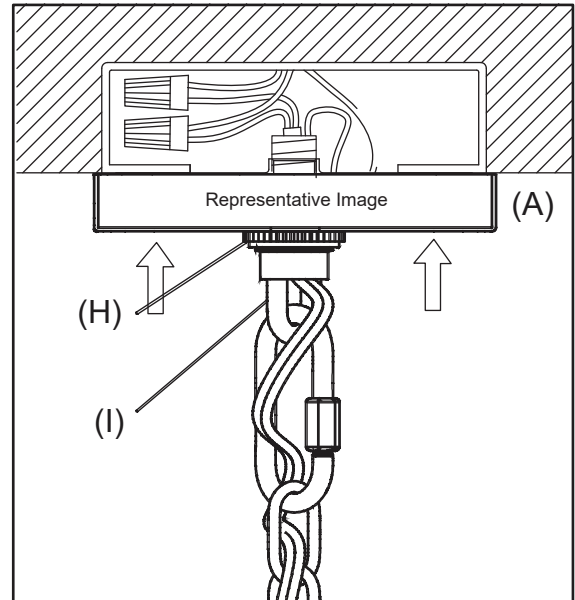

STEP 7: INSTALL BULBS

SOCKET RATING: 60W MAX Type B Bulb


*LED bulbs permit a brighter bulb without exceeding socket rating. (Scan QR Code below for details)

LUMENS (lm): Light output (brightness)

KELVIN (K): Light color. (orange/golden/white/blue)

Kelvin Range: 1800K (orange) to 6000K (white)

To mimic the color of an incandescent bulb, choose 2700K (Soft White).

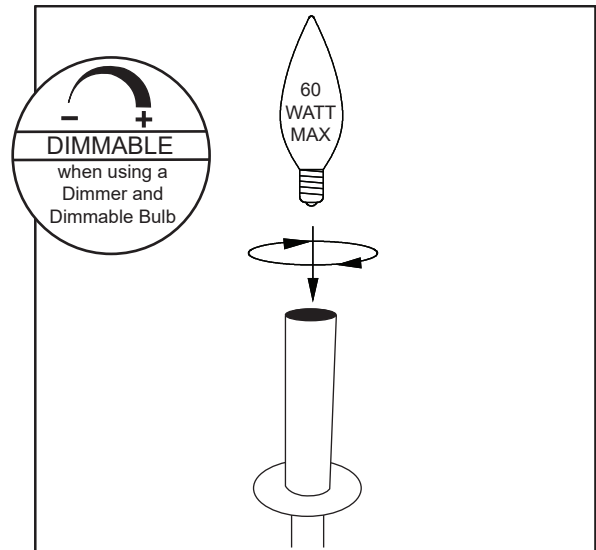


TIP

Scan this QR Code to learn more regarding **LED BULBS** and how to best use them with your new fixture!

STEP 9: RESTORE POWER

Connect breaker and turn on Light.

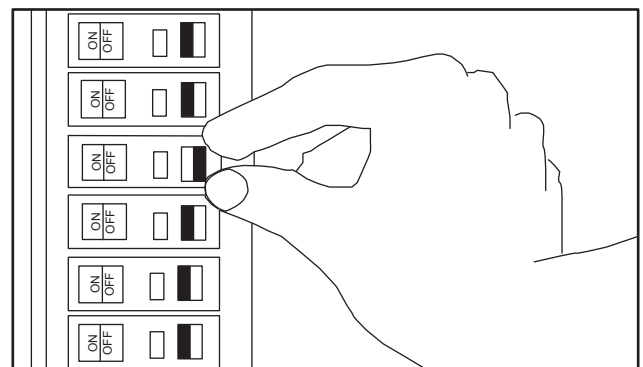

Customer Service: 800-367-2810

Online: www.ballarddesigns.com