


PRODUCT NAME: Blaire Drum Ceiling Mount

ITEM NUMBER: LM196

DIMENSIONS OF ITEM ASSEMBLED: 7" H x 15" DIA

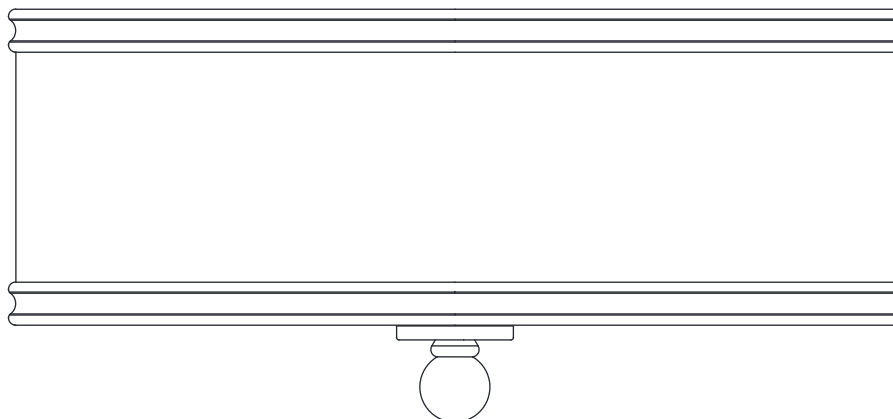

IMPORTANT SAFETY INSTRUCTIONS:

- We strongly recommend that a professional electrician install all direct wire fixtures.
- These Assembly Instructions are provided for your safety. It is important that they are read carefully and completely before assembling this Fixture.
- This product must be installed with the applicable installation code by a person familiar with the construction and operation of the product.
- This Fixture has been rated for up to 60 Watt MAX Type A Medium Bulb (NOT Included).
- Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.

WARNING:

- Deviation from the Assembly Instructions may result in a risk of fire or electric shock.
- To reduce risk of fire, electrical shock, or personal injury, always turn off and unplug Fixture and allow it to cool prior to replacing the bulb.
- Do not touch the bulb when the Fixture is turned on. Do not look directly at the lit bulb.
- Keep flammable material away from the lit bulb.

NOTE: Remove all parts and hardware from the box along with any plastic protective packaging and carefully lay all the parts out on a clean, flat surface.


DO NOT discard any contents until after assembly and installation is complete to avoid accidentally discarding small parts or hardware.

Recommended Location for Use: Dry Indoor Environment

Assembly Time: 30 Minutes

People Required: 2 or more people


Tools Required: Screwdriver, Wire Strippers
Wire Cutters, Electrical Tape

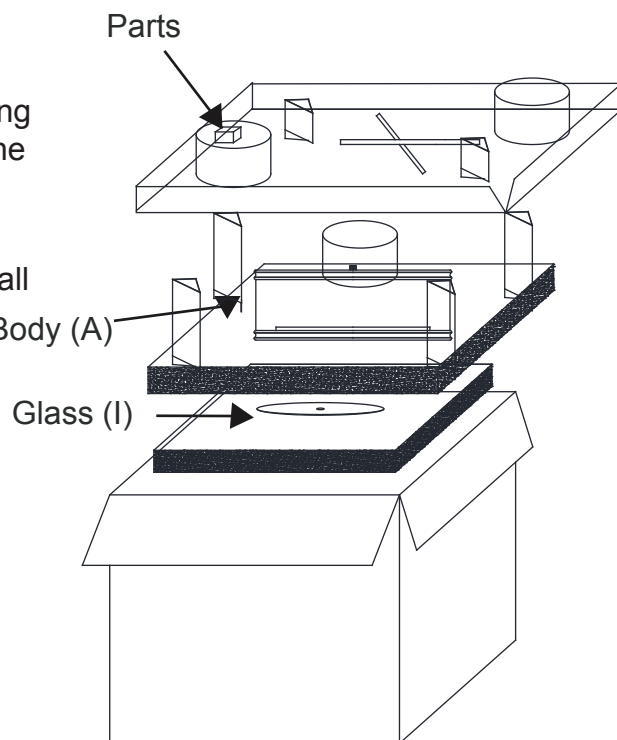

PARTS

Check to make sure you have the following:


INCLUDED:

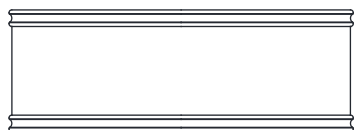

1- Fixture Body (A)




2- Mounting Screws (B)



3- Wire Connectors (C)



1- Mounting Bar (D)



1- Nipple (E)



1- Finial (F)



2- nuts (G)



1- Lock Washer (H)



1- Glass (I)



1- Metal Washer (J)

NOT INCLUDED:



2- 60 Watt Max
Type A Medium Bulbs



2- Rubber Washers (K)



1- Cap (L)




1- Stem (M)

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


STEP 1:

Attach the Nipple (E) to the Mounting Bar (D) by screwing in the Nipple and locking it on the opposite side with the Lock Washer (H) and Nut (G).

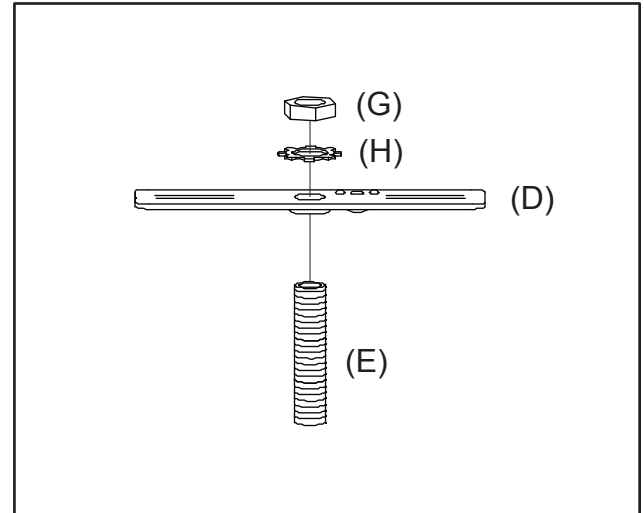

STEP 2:



Make sure the power is off, then secure the Mounting Bar (D) to the Outlet Box with the Mounting Screws (B). Tighten until snug.

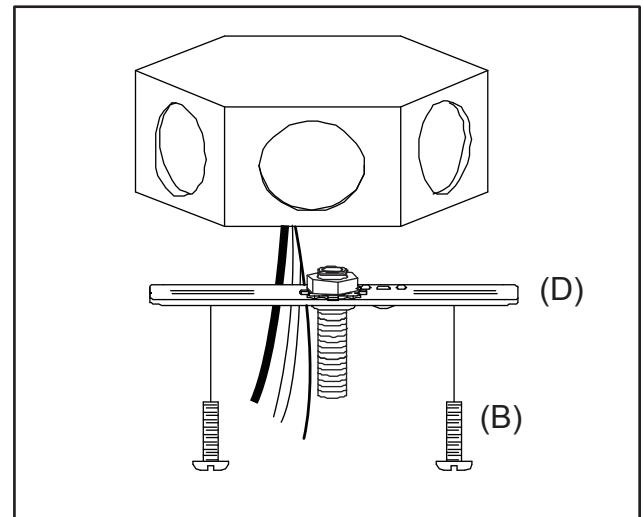

STEP 3:

Wrap the Ground Wire from the Fixture around the Ground Screw on the Mounting Bar (D). Attach the Power Supply Wires to the Fixture Wires by connecting Black to Black (or Smooth) and White to White (or Ribbed). Cover the connections using the Wire Connectors (C).


NOTE: Black Wire inside the Outlet Box may be smooth. White Wire inside the Outlet Box may be ribbed

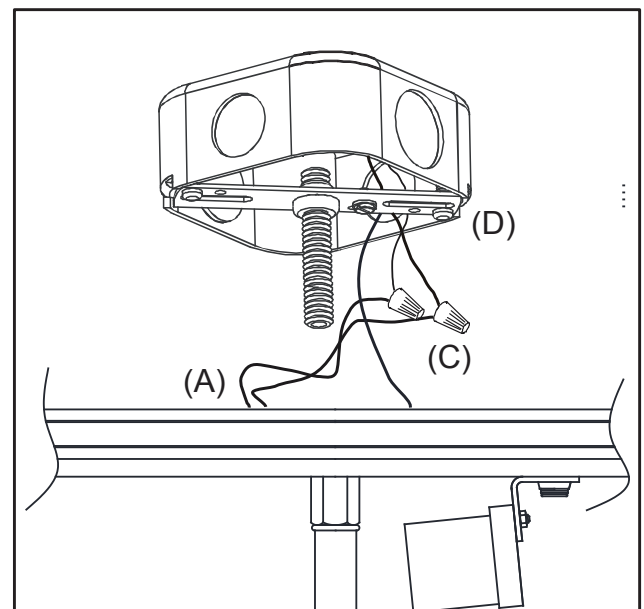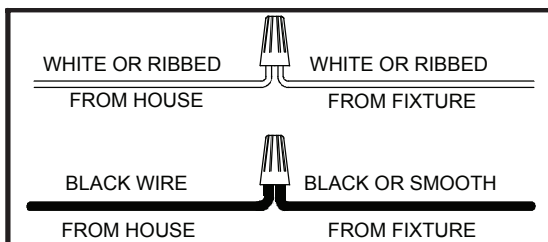

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.


STEP 4:

Attach the Fixture Body (A) to the Mounting Bar (D) by locking it to place on the Nipple (E).

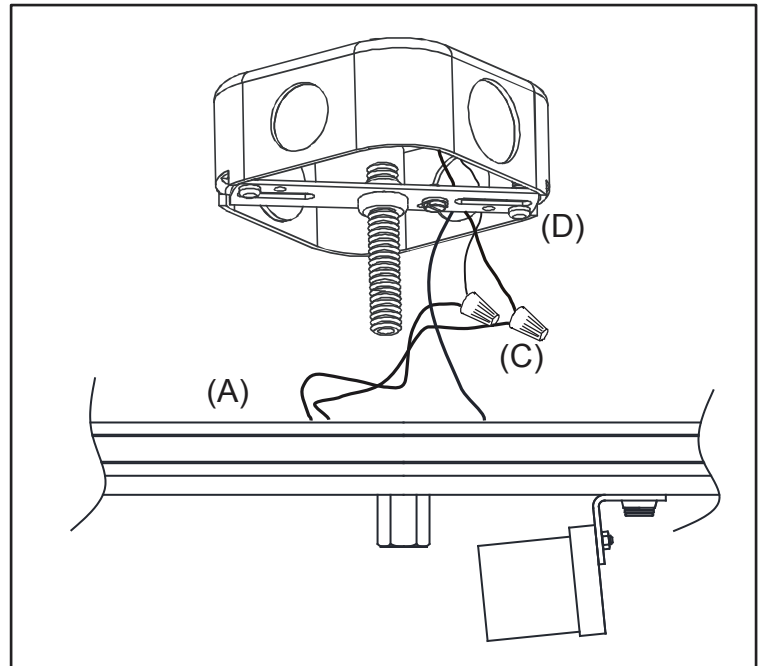

STEP 5:

Screw in the Bulbs. This Fixture has been rated for up to 60 Watt MAX Type A Medium Bulbs (NOT Included).

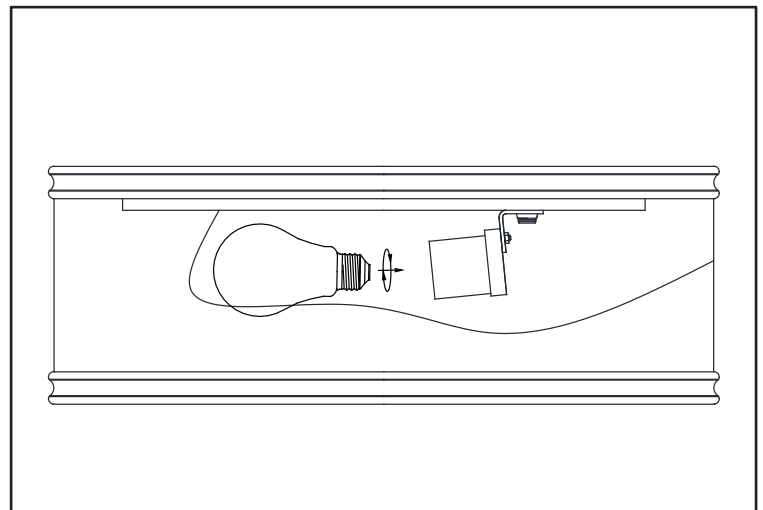

NOTE: Before starting installation of this Fixture or the removal of a previous Fixture, disconnect the power by turning off the circuit breaker or removing the fuse from the fuse box.

STEP 6:


Thread the top end of Stem (M) into the hexnut at the bottom of Fixture Body (A). Hand tighten until snug.

STEP 7:

Carefully insert the Metal Washer (J), Rubber Washer (K), Glass Shade (I), Rubber Washer (K) through the Stem (M), and secure with Nut (G). Hand tighten until snug.

STEP 8:

Place Cap (L) over the protruding Stem (M) and secure with Finial (F). Hand tighten until snug.

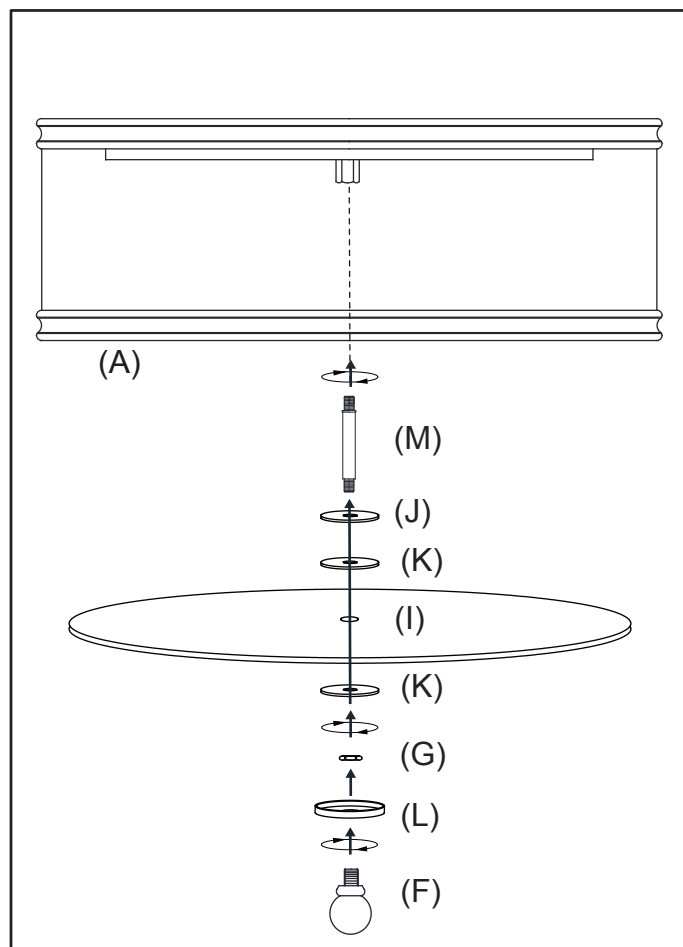

STEP 9:

Connect breaker and turn on Light.

Cleaning & Care:

To clean, wipe the Fixture with a soft, dry cloth.
Avoid the use of harsh or abrasive chemicals
as they may damage the finish.