




PRODUCT NAME: Arlo Linear Chandelier

ITEM NUMBER: LR095

ASSEMBLED DIMENSIONS: 50" L x 8"W x 24"H

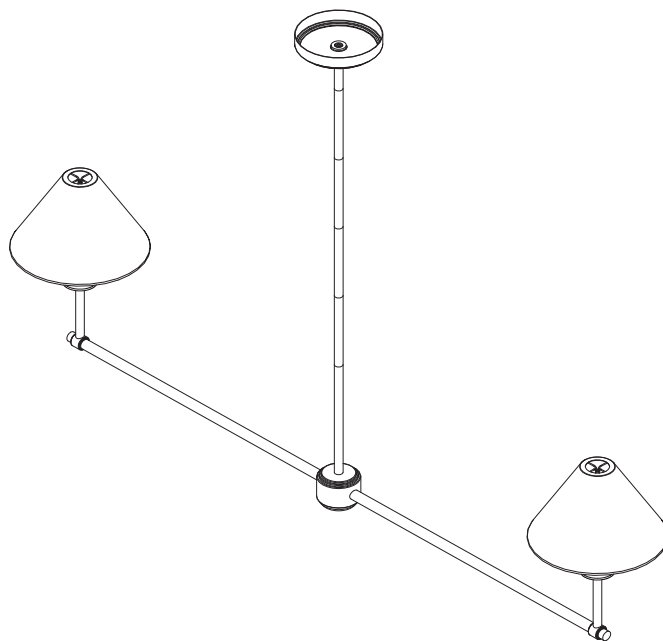

! IMPORTANT SAFETY INSTRUCTIONS:

- A licensed professional electrician should install direct wire fixtures.
- For your safety, please read instructions carefully and completely before beginning assembly or installation. If unsure, contact a licensed electrician.
- Fixture must be installed according to applicable code(s) by a person familiar with its construction and operation. If unsure, contact a licensed electrician.
- Fixture rated up to 60 Watt MAX Type B bulbs (not included). LED bulbs may be used.
- Prior to installation or removal of a previous fixture, disconnect power by turning off power at circuit breaker or removing fuse at electrical panel.

! WARNING:

- Deviation from assembly instructions may cause risk of fire or electric shock.
- To reduce risk of personal injury, always turn off fixture and allow bulbs to cool prior to replacement.
- Do not touch or look directly at illuminated bulbs.
- Keep flammable material away from illuminated bulbs.

PRODUCTS ARE NOT INTENDED
FOR COMMERCIAL USE.

UPDATED: 3-4-2020

MADE IN CHINA

Page 1 of 5



Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

Remove all parts, hardware and protective packaging from carton and carefully arrange on a clean, level surface.




Prevent accidentally discarding small parts or hardware. Retain all carton contents until assembly and installation are complete.

Approved Location for Use: Dry Indoord Environment

Assembly Time: 15 Minutes


People Required: 1 or more

Tools Required: Screwdriver, Wire Strippers, Wire Cutters, Electrical Tape

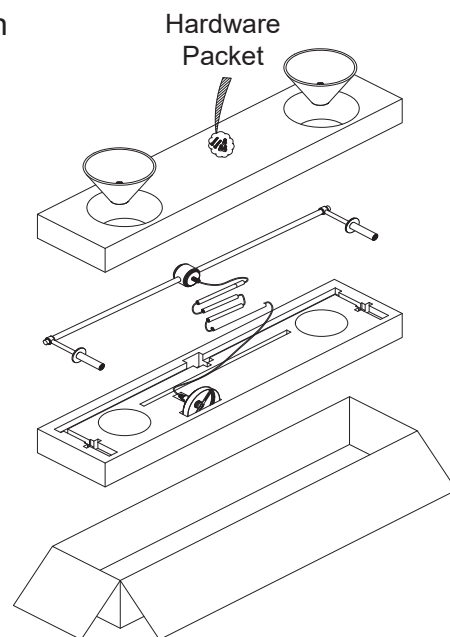

HARDWARE AND COMPONENTS


INCLUDED:




1 - Canopy (A)




3 - Wire Connectors (B)



1 - Mounting Bracket (C)



1 - Collar (D)



1 - Coupler (E)



2 - Mounting Screws (F)
5/32" x 32T x 1 1/4"



1 - 1" Stem (G)



1 - 6" Stem (H)




3 - 12" Stem (I)




1 - 22" Stem (J)


NOT INCLUDED:



2 - 60 Watt Max
Type B Bulbs
*LED bulbs may be used.

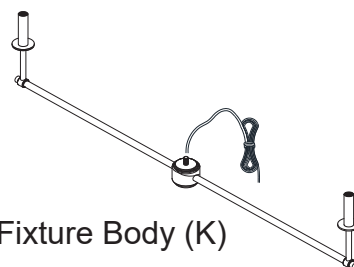

1 - Fixture Body (K)



2 - Metal Shades (L)



Cleaning and Care

Periodically wipe Fixture with a soft, dry cloth.
Avoid harsh or abrasive chemicals as
finish damage may result.



Customer Service: 800-367-2810
Online: www.ballarddesigns.com




Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

STEP 1: ASSEMBLE FIXTURE

Determine drop measurement (ceiling to bottom of fixture) and add/delete Stems 1" (G), 6" (H), 12" (I) and 22" (J) as required. Place Fixture Body (K) onto a padded surface and carefully turn Stems onto Fixture Body while working wires through each.




Do not twist fixture cord while turning these pieces together.

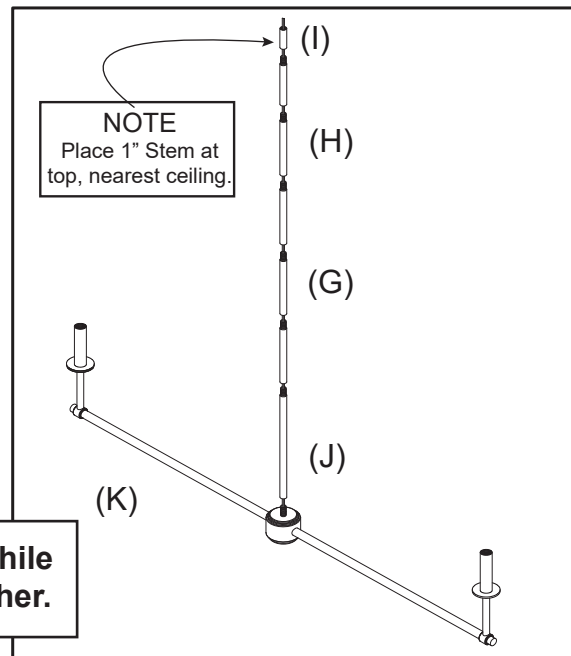


STEP 2: ADD MOUNTING HARDWARE

Slide Collar (D) down Stem Assembly followed by Canopy (A) (orient both as illustrated). Carefully thread wires through Coupler (E) and turn onto top of assembly as illustrated. Finally, thread in and turn to tighten Mounting Bracket (C). Orient with Green Ground Screw facing down, toward Fixture Body.

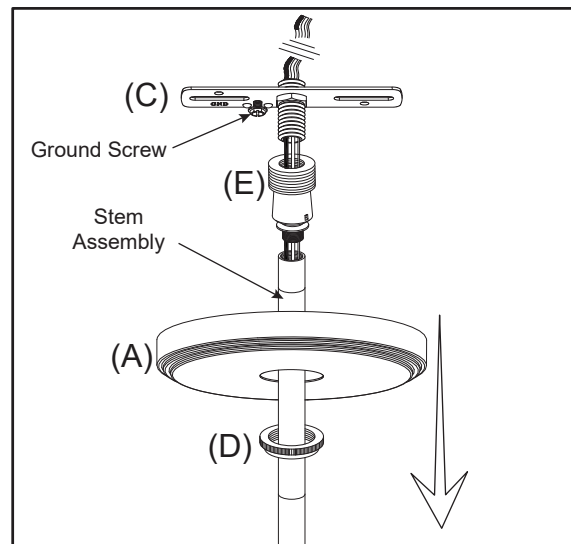

STEP 3: ATTACH MOUNTING HARDWARE

Carefully lift partially assembled Fixture to Junction Box and attach Mounting Bracket (C) to box using Mounting Screws (F). Fully tighten using a Phillips Screwdriver.

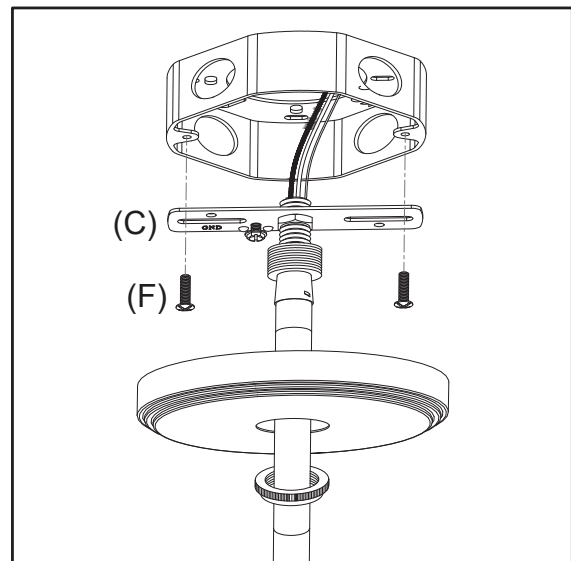

Customer Service: 800-367-2810
Online: www.ballarddesigns.com



Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.


STEP 4: CONNECT ELECTRICAL

Trim wires leaving at least 6" to make electrical connection. Strip ends of 3/4" insulation. Attach bare (or green) ground wire from fixture to bare (or green) ground wire in junction box using Wire Connector (B). Wrap both around green ground screw on Mounting Bracket (C) and firmly tighten.




TO AVOID ELECTRICAL SHOCK, WIRE FOR CORRECT POLARITY: Connect wires BLACK to *BLACK. Connect wires WHITE to WHITE. Firmly secure with Wire Connectors. SEE INSET BELOW:

* Black wire may be red in some installations.

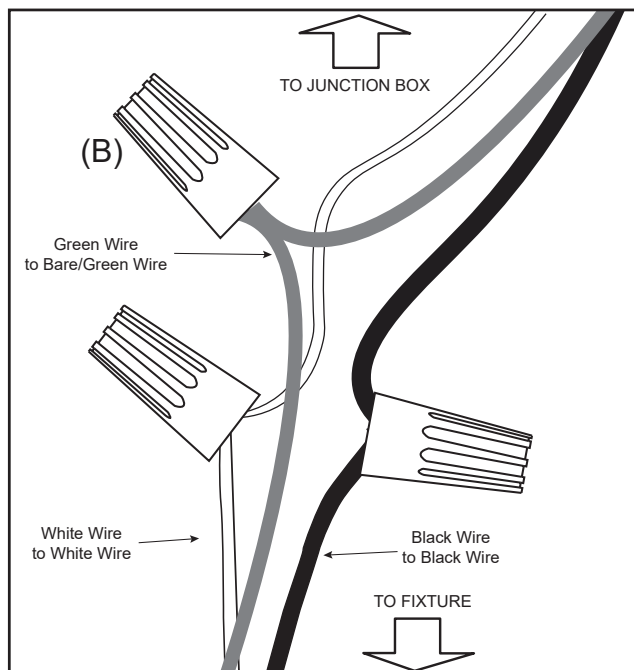


1

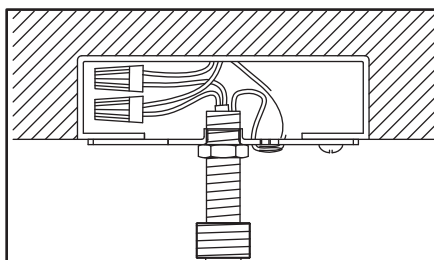


STEP 5: COVER JUNCTION BOX

1. Carefully tuck all wires into Junction Box.
2. Slide Ceiling Canopy (A) over Junction Box followed by Collar (D).
3. Thread Collar onto Coupler (E) and tighten until Canopy is firmly pressed against ceiling.

3

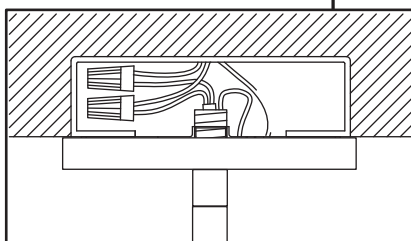

2

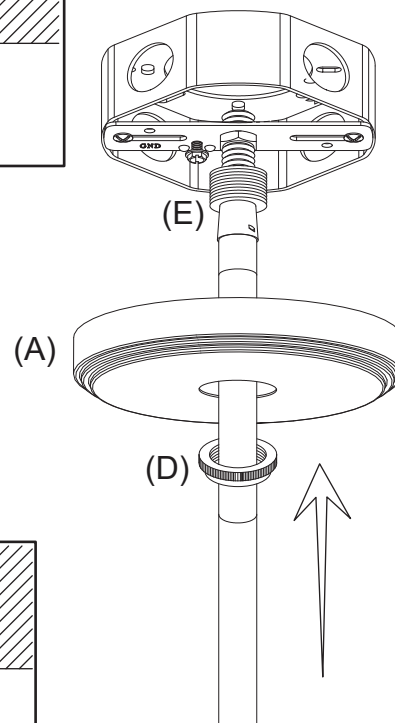

Customer Service: 800-367-2810
Online: www.ballarddesigns.com




Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.



STEP 6: INSTALL BULBS

Sockets on this Fixture rated up to 60 Watt
Maximum Type B Bulbs.

*LED bulbs may be used and permit a choice of
brighter bulb without exceeding socket rating.
To mimic the color of an incandescent,
choose 2700K Soft White.

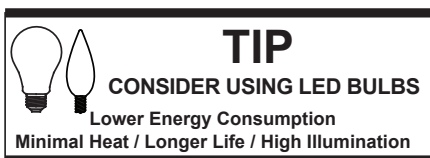


Light Output Lumens	Energy Consumption	
	LED Watts	Incandescent Watts
450	4-5	40
800	6-8	60
1,100	9-13	75
1,600	16-20	100
2,600	25-28	150

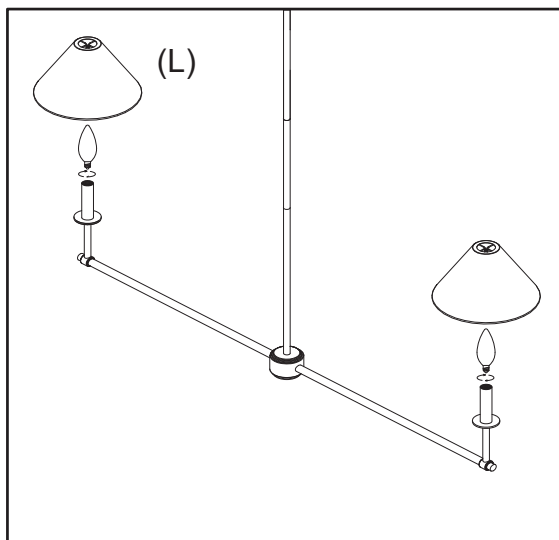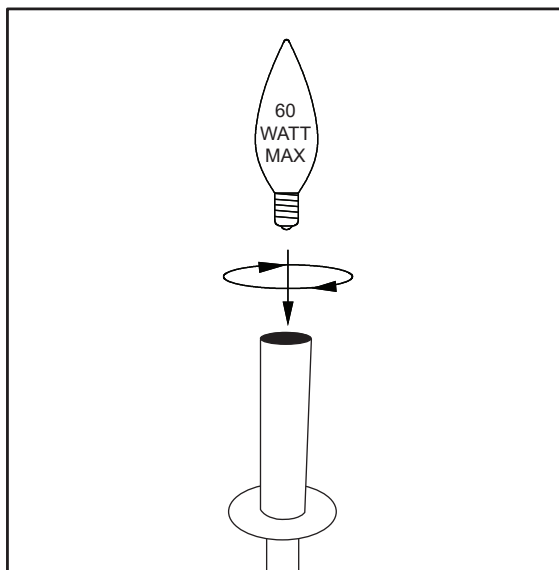

STEP 7: INSTALL SHADES

Clip each Metal Shade (L) onto bulbs.

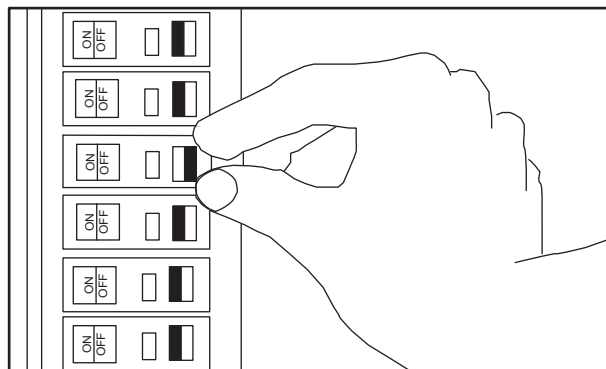

STEP 8: RESTORE POWER

Connect breaker and turn on Light.



Customer Service: 800-367-2810

Online: www.ballarddesigns.com