




PRODUCT NAME: Margot Double Shade Pendant

ITEM NUMBER: LR069

ASSEMBLED DIMENSIONS: 22-7/8" H x 35-7/8" W x 2" E

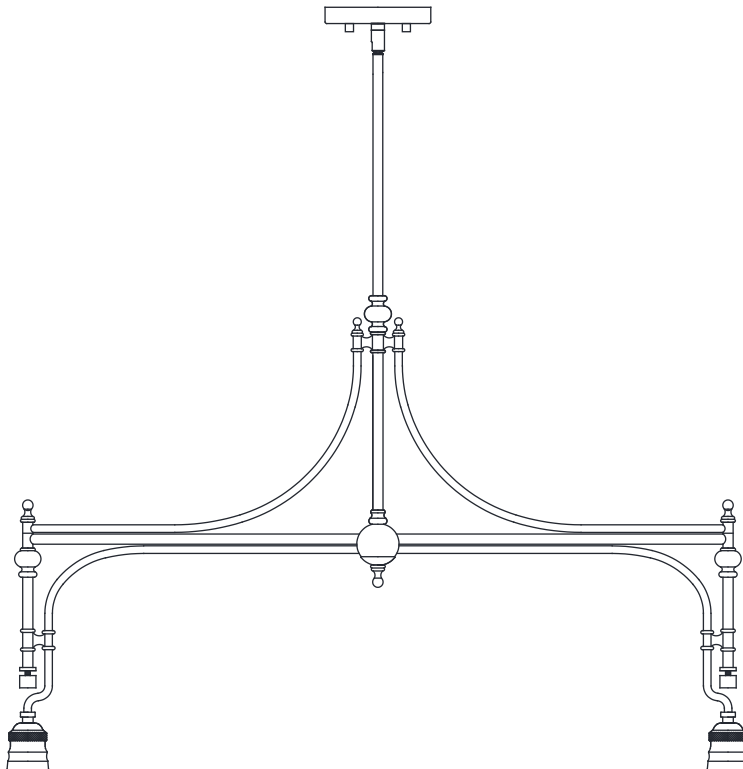

IMPORTANT SAFETY INSTRUCTIONS:

- A licensed professional electrician should install direct wire fixtures.
- For your safety, please read instructions carefully and completely before beginning assembly or installation.
- Fixture must be installed according to applicable code(s) by a person familiar with its construction and operation.
- Fixture rated up to 60 Watt MAX Type A INCANDESCENT bulb(s) (NOT included). LED bulb(s) may be used.
- Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

WARNING:

- Deviation from assembly instructions may cause risk of fire or electric shock.
- To reduce risk of personal injury, always turn off fixture and allow bulbs to cool prior to replacement.
- Do not touch or look directly at illuminated bulbs.
- Keep flammable material away from illuminated bulbs.

PRODUCTS ARE NOT INTENDED
FOR COMMERCIAL USE.

UPDATED: 4-8-2025

MADE IN CHINA

Page 1 of 5



Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

Remove all parts, hardware and protective packaging from carton and carefully arrange on a clean, level surface.




Prevent accidentally discarding small parts or hardware. Retain all carton contents until assembly and installation are complete.

Approved Location for Use: Dry Indoor Environment

Assembly Time: 10 Minutes

People Required: 1 or more


Tools Required: Screwdriver, Wire Strippers, Wire Cutters, Electrical Tape

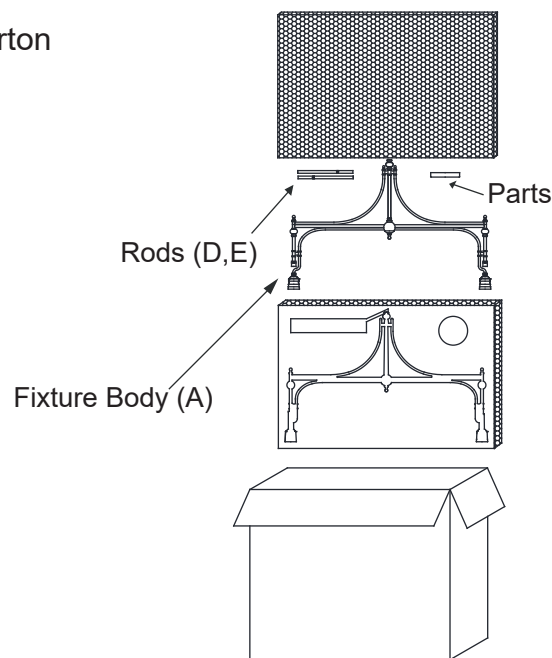


PARTS

Check to make sure you have the following:


INCLUDED:

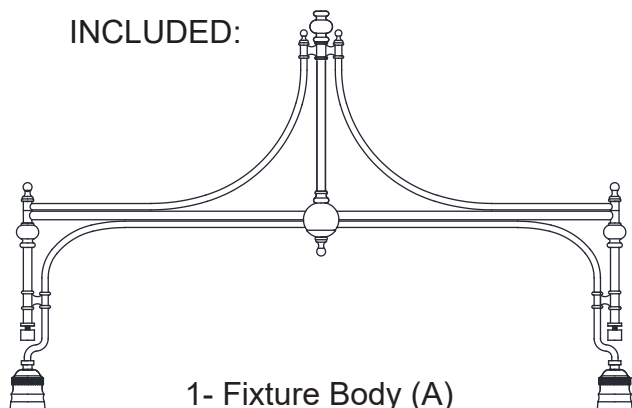

1- Fixture Body (A)



1- Canopy (B)



1- Mounting Bracket (C)



3- Long Rods (D)
1/2" x 12"



1- Short Rod (E)
1/2" x 6"



2- Finials (F)

NOT INCLUDED:



(2 Bulbs) - 60 Watt Max
Type A Bulb
*LED bulbs may be used.



3- Wire Connectors (G)



2- Mounting Screws (H)
5/32" x 32 x 1 1/4"



Customer Service: 800-367-2810
Online: www.ballarddesigns.com



Cleaning and Care

Periodically wipe Fixture with a soft, dry cloth.
Avoid harsh or abrasive chemicals as
finish damage may result.



Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.


STEP 1: ASSEMBLE RODS

NOTE: Decide how low you would like the fixture to hang, then determine how many Long Rods (D) and Short Rod (E) you will need to make this length.

Connect Long Rods to top of Fixture Body (A) and Short Rod last, nearest the Canopy.



Do not twist fixture cord while turning these pieces together.

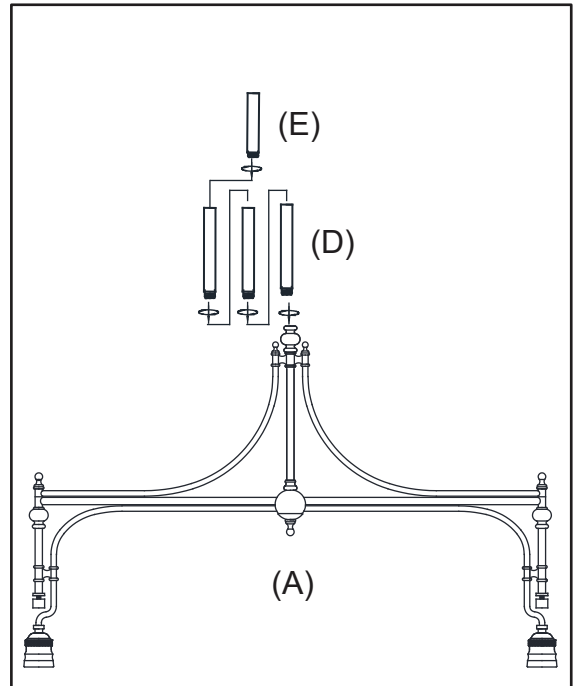


STEP 2: ASSEMBLE MOUNTING HARDWARE

Thread the wires through the Canopy (B) and attach the Canopy (B) to the Short Rod (E), then screw the parts together.




Do not twist fixture cord while turning these pieces together.

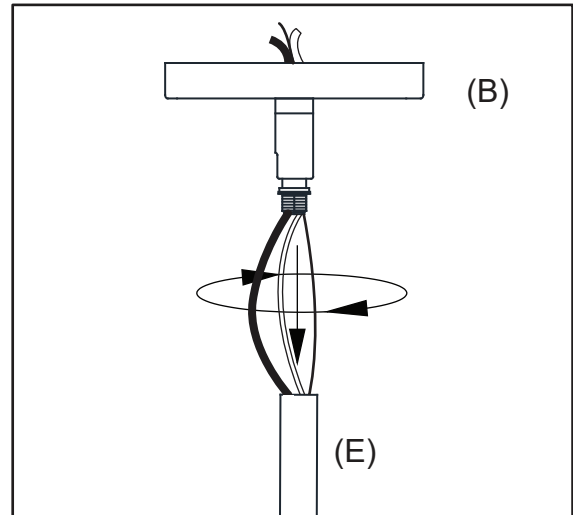

STEP 3: ATTACH MOUNTING HARDWARE

Make sure the power is off, then secure the Mounting Bracket (C) to the Outlet Box with the Mounting Screws (H). Tighten until snug.

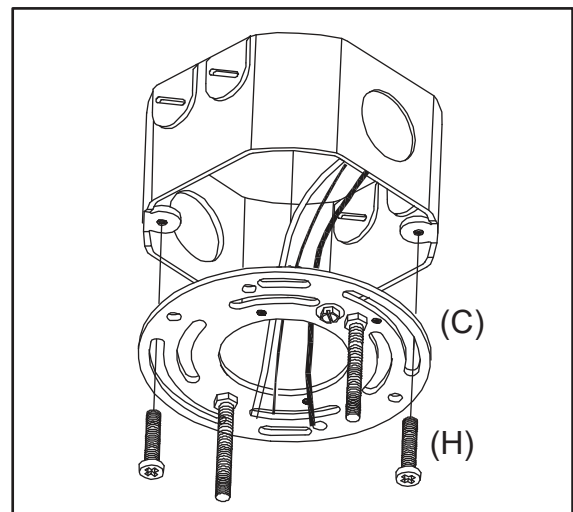

Customer Service: 800-367-2810
Online: www.ballarddesigns.com





Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

STEP 4: CONNECT ELECTRICAL



Trim wires leaving at least 12" to make electrical connection. Strip ends of 1/2" insulation. Attach bare (or green) ground wire from fixture to bare (or green) ground wire in junction box using Wire Connector (G). Wrap both around green ground screw on Mounting Bar (L) and firmly tighten.

⚡ TO AVOID ELECTRICAL SHOCK, WIRE FOR CORRECT POLARITY: Connect wires BLACK (or smooth) to BLACK. Connect wires WHITE (or ribbed along the edge) to WHITE. Firmly secure with Wire Connectors. SEE INSET BELOW:

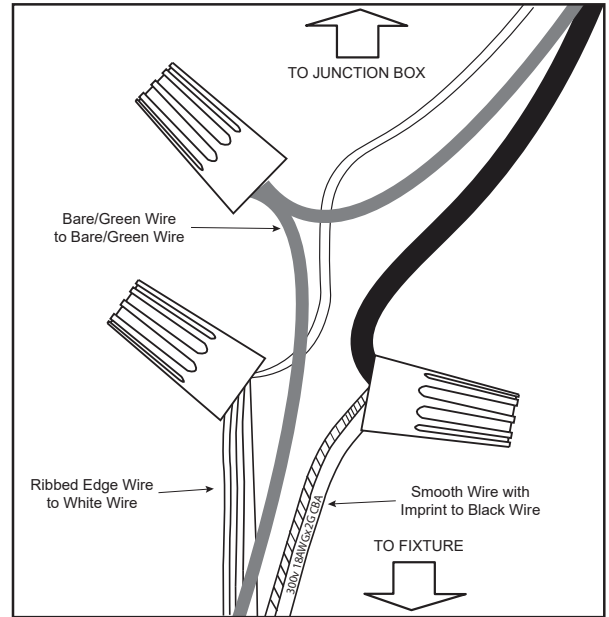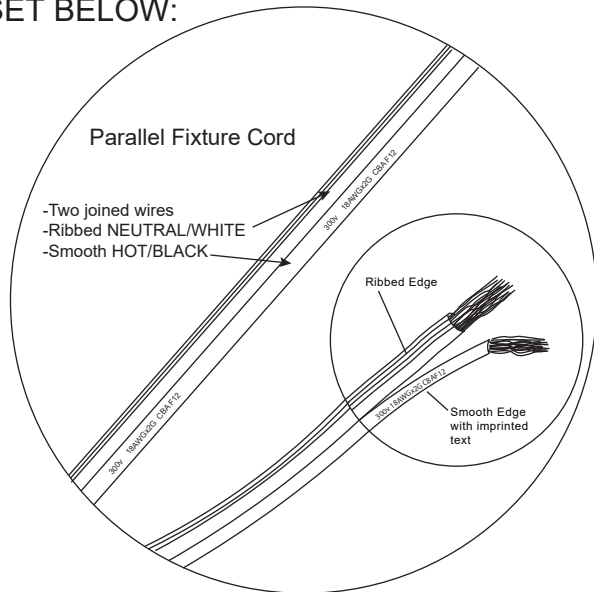

STEP 5: COVER JUNCTION BOX

Attach the Canopy (B) to the Mounting Bracket (C) by screwing on the Finials (F).

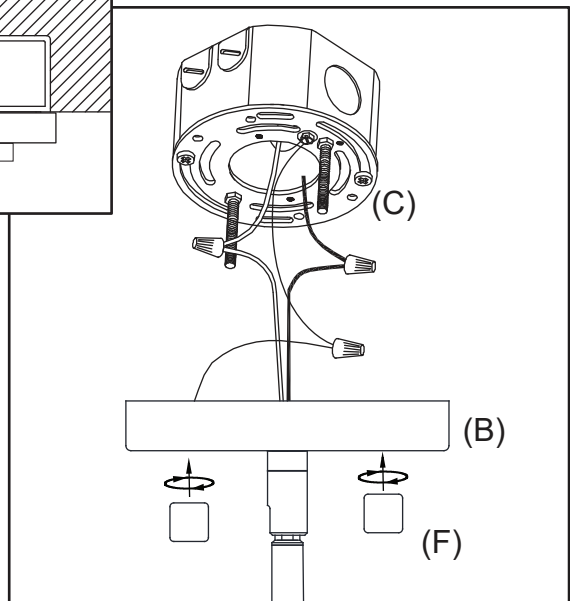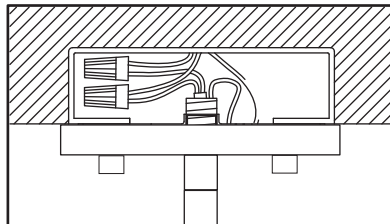

Customer Service: 800-367-2810
Online: www.ballarddesigns.com



Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

STEP 6: INSTALL SHADES (NOT INCLUDED)


Remove Finial (attached to Fixture Body (A) just above Socket assembly) then slip Shade, TOP FIRST, over Socket and slide center ring over threaded nipple. Replace and tighten Finial to secure Shade.

STEP 7: INSTALL BULBS

Sockets on this Fixture rated up to 60 Watt Maximum Type A Bulbs.

*LED bulbs may be used and permit a choice of brighter bulb without exceeding socket rating. To mimic the color of an incandescent, choose 2700K Soft White.

NOTE
Fit Shade over Socket
TOP FIRST
See video with Margot
listing on our website!

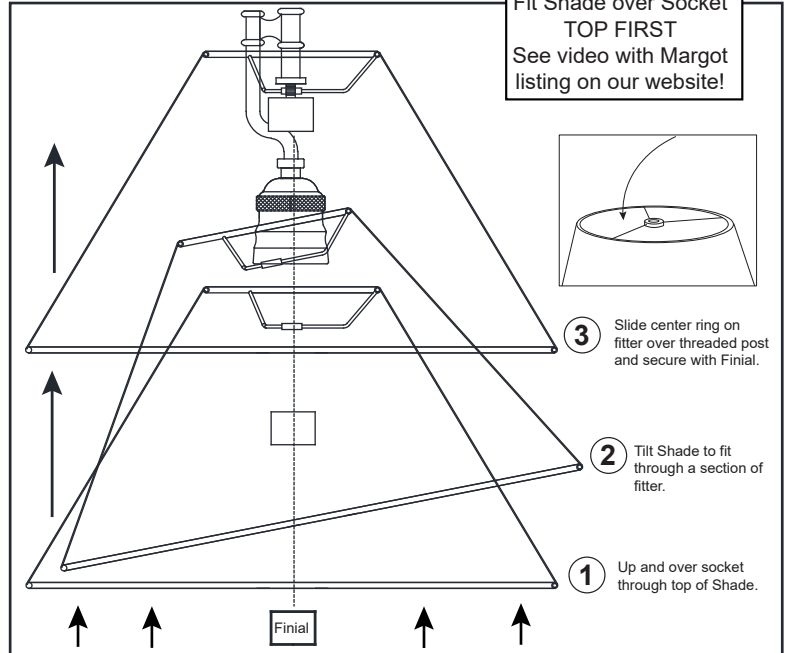


TIP

CONSIDER USING LED BULBS

Lower Energy Consumption


Minimal Heat / Longer Life / High Illumination

| Light Output Lumens | Energy Consumption | |
|------------------------|--------------------|-----------------------|
| | LED Watts | Incandescent Watts |
| 450 | 4-5 | 40 |
| 800 | 6-8 | 60 |
| 1,100 | 9-13 | 75 |
| 1,600 | 16-20 | 100 |
| 2,600 | 25-28 | 150 |

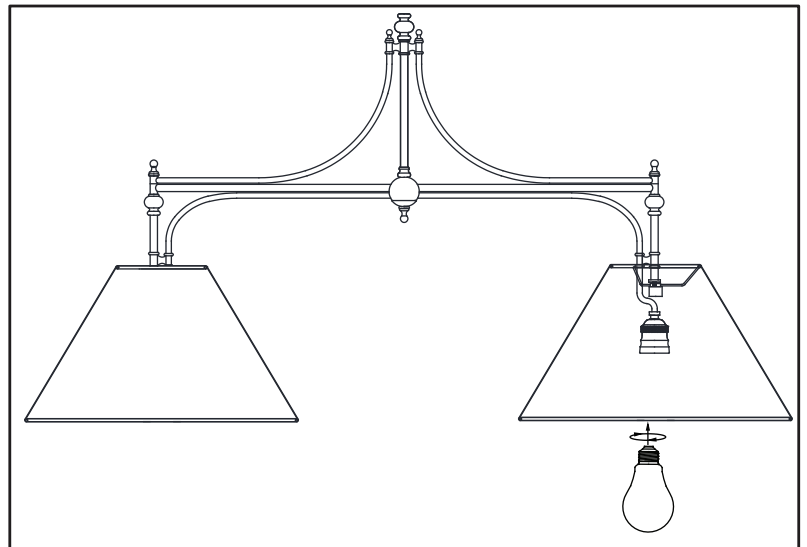

STEP 8:

Connect breaker and turn on Light.

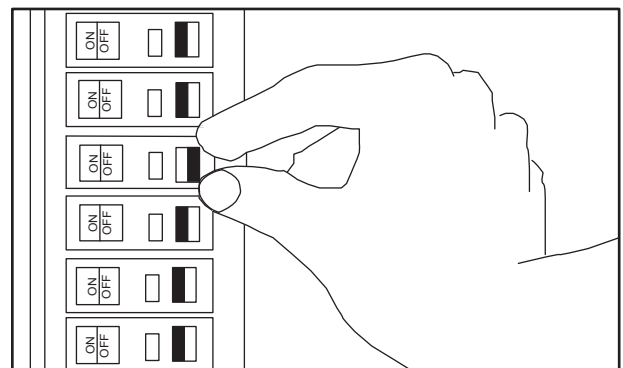

Customer Service: 800-367-2810

Online: www.ballarddesigns.com