




PRODUCT NAME: Charleston Scalloped Ceiling Mount

ITEM NUMBER: LM226

ASSEMBLED DIMENSIONS: 8"H x 16" Diameter

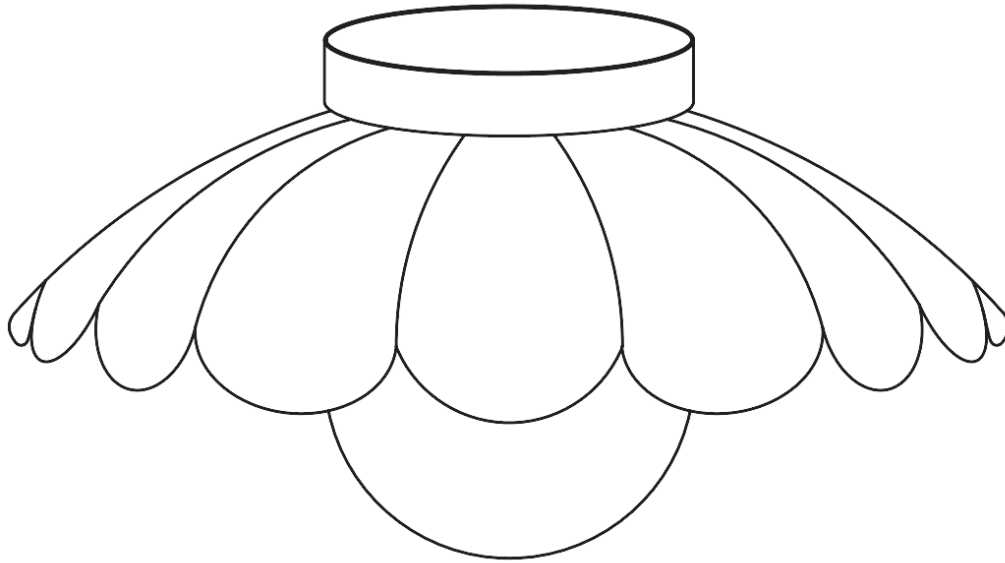

IMPORTANT SAFETY INSTRUCTIONS:

- A licensed professional electrician should install direct wire fixtures.
- For your safety, please read instructions carefully and completely before beginning assembly or installation. If unsure, contact a licensed electrician.
- Fixture must be installed according to applicable code(s) by a person familiar with its construction and operation. If unsure, contact a licensed electrician.
- Fixture rated up to 60 Watt MAX Type A bulb (not included). LED recommended.
- Prior to installation or removal of a previous fixture, disconnect power by turning off power at circuit breaker or removing fuse at electrical panel.

WARNING:

- Deviation from assembly instructions may cause risk of fire or electric shock.
- To reduce risk of personal injury, always turn off fixture and allow bulbs to cool prior to replacement.
- Do not touch or look directly at illuminated bulbs.
- Keep flammable material away from illuminated bulbs.



Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

Remove all parts, hardware and protective packaging from carton and carefully arrange on a clean, level surface.



Prevent accidentally discarding small parts or hardware. Retain all carton contents until assembly and installation are complete.

Approved Location for Use: Dry Indoor Environment


Assembly Time: 15 minutes

People Required: 1 or more

Tools Required: Screwdriver, Electrical Tape, Wire Strippers, Wire Cutters, Pliers


Fixture Body (E)

Glass shade (F)

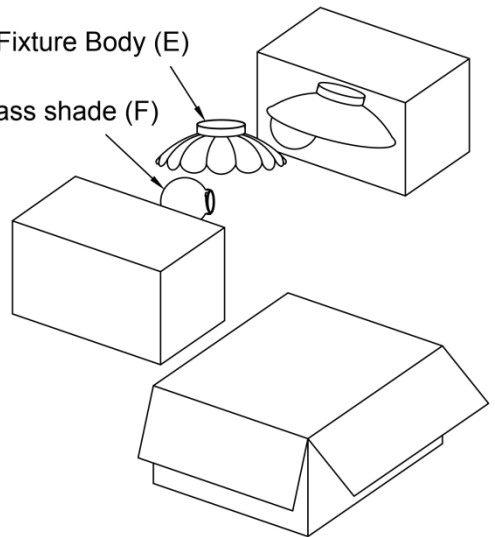


HARDWARE AND COMPONENTS

INCLUDED:

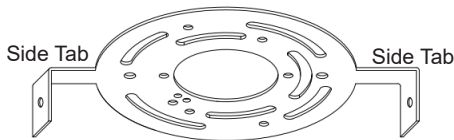


1- Mounting Bracket (A)




2- Set Screws (D)
5/32" x 32T x 1/2"



2- Mounting Screws (B)
5/32" x 32T x 1-1/4




3- Wire Connectors (C)

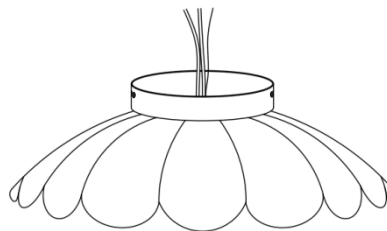


1- Fixture Body (E)

NOT INCLUDED:

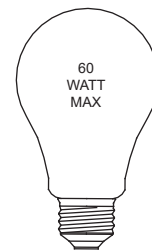

1 - 60 Watt MAX
Type A Bulb
*LED recommended.



1- Glass Shade (F)

Unwrap and Install
Glass Shade
as Final Step



Cleaning and Care

Periodically wipe Fixture with a soft, dry cloth.
Avoid harsh or abrasive chemicals as
finish damage may result.




Customer Service: 800-367-2810
Online: www.ballarddesigns.com



Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

STEP 1: INSTALL MOUNTING HARDWARE

Attach Mounting Bracket (A) to Junction Box using Mounting Screws (B).

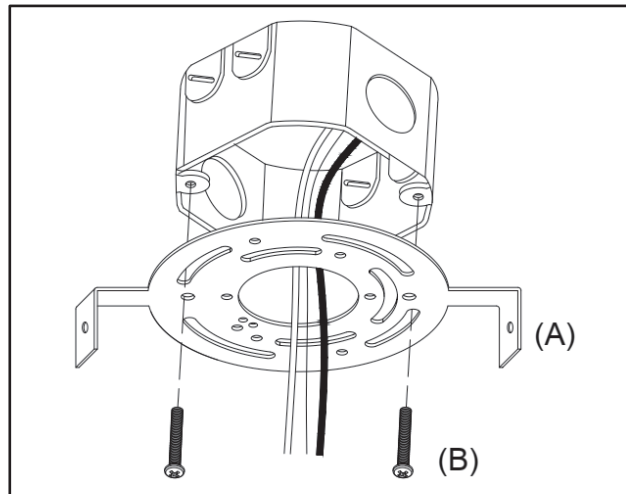

STEP 2: CONNECT ELECTRICAL

If necessary, strip wire ends of 1/2" of insulation then attach bare (or green) ground wire from Fixture to bare (or green) ground wire from Junction Box and attach using Wire Connector (C). Wrap both around Green Ground Screw on Mounting Bracket (E) and firmly tighten.




TO AVOID ELECTRICAL SHOCK, WIRE FOR CORRECT POLARITY:

Connect BLACK wires to *BLACK.


Connect WHITE wires to WHITE. Firmly secure all connections with a Wire Connector (C).

*May be Red on 3-way (SPDT) circuits.

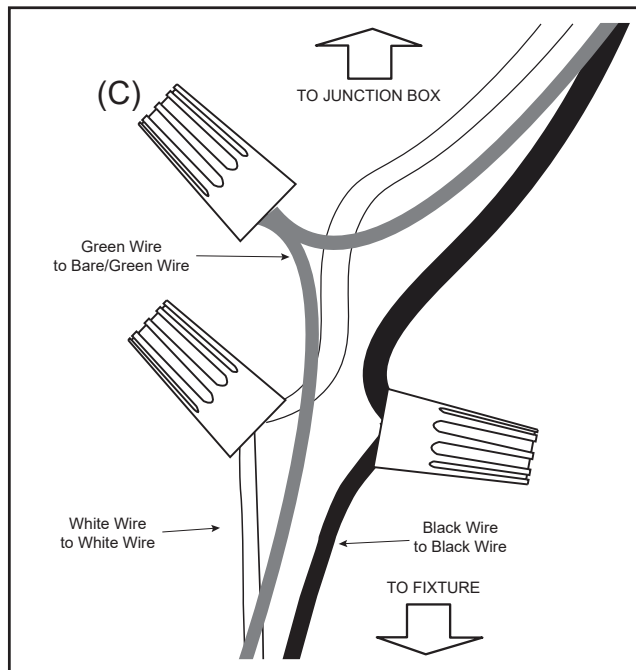

STEP 3: INSTALL FIXTURE

Gently lift fixture toward junction box while carefully tucking wires into Junction Box. Align holes in top of Fixture Body (E) with holes in side tabs on Mounting Bracket (A). Push upward then add Set Screws (D) into holes as illustrated. Tighten to secure Fixture.

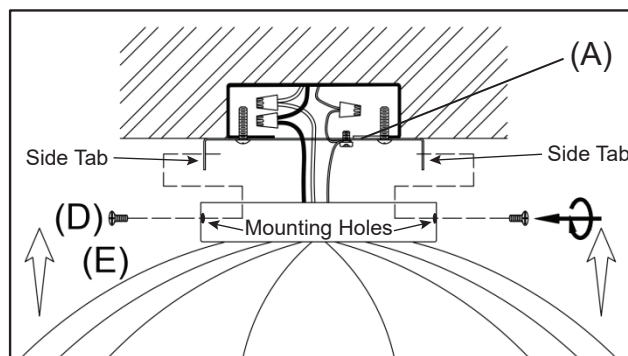

Customer Service: 800-367-2810
Online: www.ballarddesigns.com



Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

STEP 4: INSTALL BULB

SOCKET RATING: 60W MAX Type A Bulb

*LED bulbs permit a brighter bulb without exceeding socket rating.

LUMENS (lm): Light output (brightness)

KELVIN (K): Light color. (orange/golden/white)



Kelvin Range: 1800K (orange) to 6000K (white)

To mimic the color of an incandescent bulb, choose 2700K (Soft White).



TIP


Scan this QR Code
to learn more
regarding
LED BULBS
and how to best use them
with your new fixture!

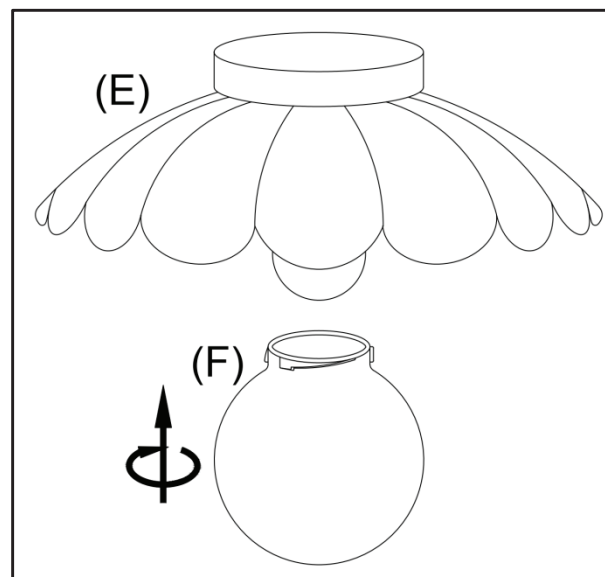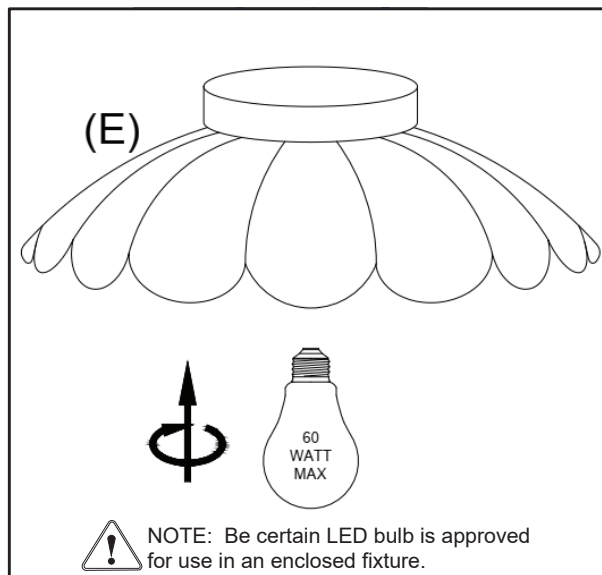

STEP 5: INSTALL GLASS SHADE

Thread, turn and tighten Glass Shade (F) onto base of Fixture Body (E).

STEP 6: RESTORE POWER/TURN ON LIGHT

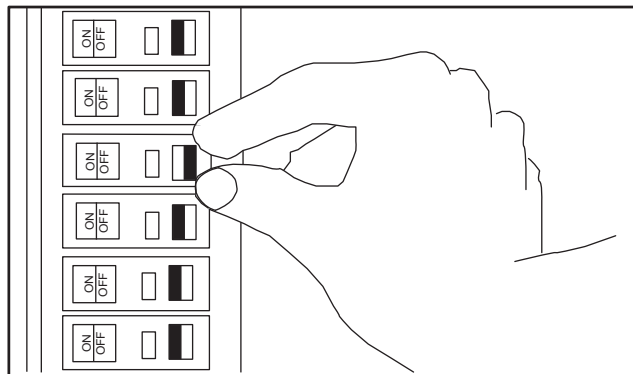

Customer Service: 800-367-2810
Online: www.ballarddesigns.com