


PRODUCT NAME: Felix Articulating Wall Sconce

ITEM NUMBER: LW599

ASSEMBLED DIMENSIONS: 10"H x 10"W x 31" Projection

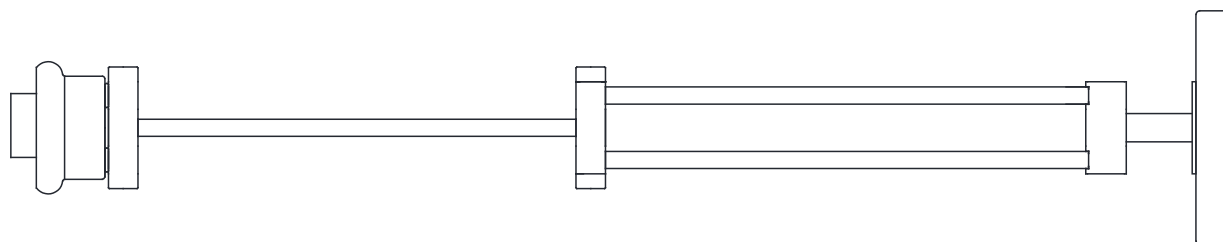

IMPORTANT SAFETY INSTRUCTIONS:

- A licensed professional electrician should install direct wire fixtures.
- For your safety, please read instructions carefully and completely before beginning assembly or installation.
- Fixture must be installed according to applicable code(s) by a person familiar with its construction and operation.
- Fixture rated up to 60 Watt MAX Type A INCANDESCENT bulb (not included). LED bulb may be used.
- Prior to installation or removal of a previous fixture, disconnect power by turning off power at circuit breaker or removing fuse at electrical panel.

WARNING:

- Deviation from assembly instructions may cause risk of fire or electric shock.
- To reduce risk of personal injury, always turn off fixture and allow bulbs to cool prior to replacement.
- Do not touch or look directly at illuminated bulbs.
- Keep flammable material away from illuminated bulbs.

Remove all parts, hardware and protective packaging from carton and carefully arrange on a clean, level surface.


NOTE: To avoid accidentally discarding small parts or hardware, retain all carton contents until after assembly and installation are complete.

Recommended Location for Use: Dry Indoor Environment

Assembly Time: 25 minutes

People Required: 2




Tools Required: Screwdriver, Electrical Tape, Wire Strippers, Wire Cutters

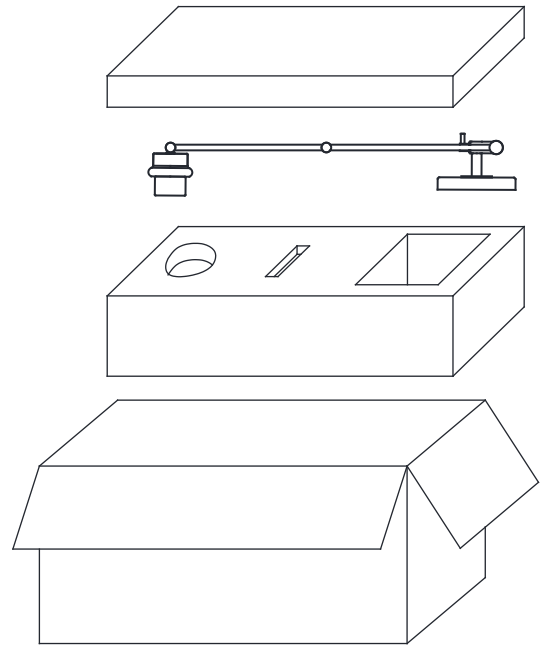


PARTS

Check to make sure you have the following:


INCLUDED:

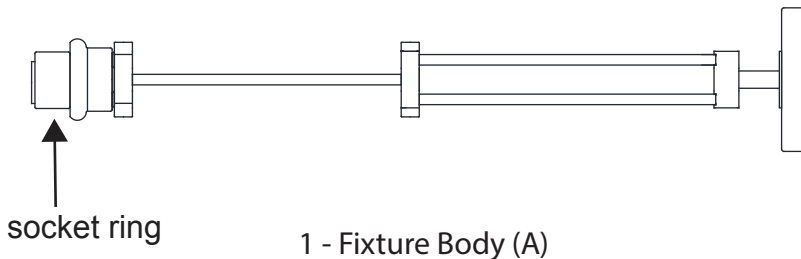

NOT INCLUDED:



1 - 60 Watt MAX Incandescent
Type A Bulb
*LED may be used.

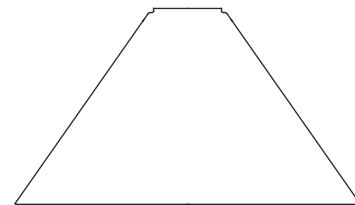


Shade (F)
NOT INCLUDED
SOLD SEPARATELY

NOTE: Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

STEP 1: INSTALL MOUNTING HARDWARE

Attach Mounting Bracket (B) to Junction Box using Mounting Screws (C).

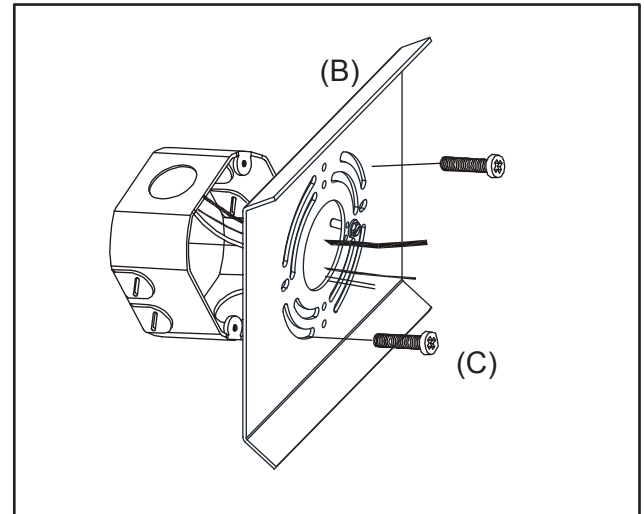


STEP 2: CONNECT ELECTRICAL

If necessary, strip wire ends of 1/2" of insulation then attach bare (or green) ground wire from Fixture to bare (or green) ground wire from Junction Box and attach using Wire Connector (D). Wrap both around Green Ground Screw on Mounting Bracket (B) and firmly tighten.

TO AVOID ELECTRICAL SHOCK, WIRE FOR CORRECT POLARITY:

Connect BLACK wires to BLACK.
Connect WHITE wires to WHITE. Firmly secure all connections with a Wire Connector (D).

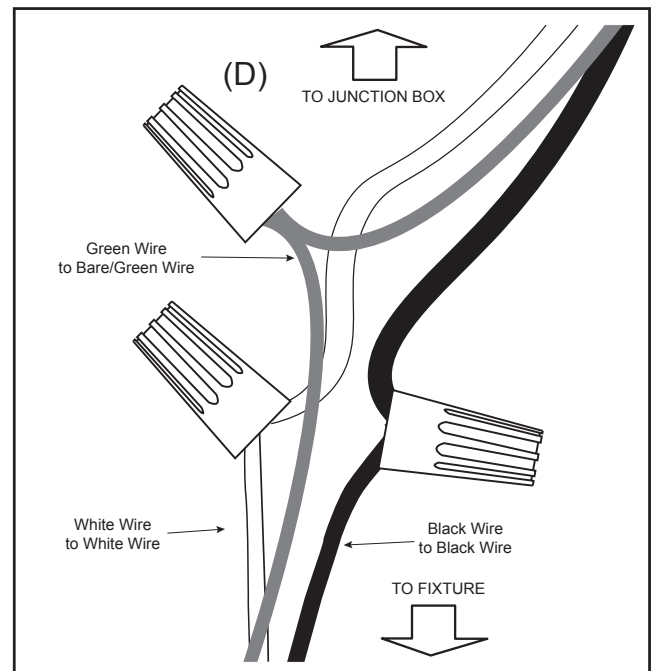

NOTE: Prior to installation or removal of a previous fixture, disconnect power by turning off circuit breaker or removing fuse at electrical panel.

STEP 3: ATTACH FIXTURE

Gently lift fixture toward junction box while carefully tucking wires into box. Align holes in side of Fixture Body (A) and insert then thread in Set Screw (E). Tighten until fixture is secured.


STEP 4: INSTALL SHADE

Remove socket ring from the socket of the Fixture Body (A), then carefully place Shade (F) (Not Included) to the socket of the Fixture Body (A), securing with socket ring.




STEP 5: INSTALL BULBS

Gently turn bulbs into sockets which are rated up to 60 Watt MAX Incandescent Type A Candelabra bulbs.

LED bulbs may be used. To mimic the color of an incandescent, choose 2700K Warm White.

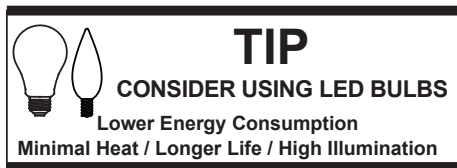

Light Output Lumens	Energy Consumption	
	LED Watts	Incandescent Watts
450	4-5	40
800	6-8	60
1,100	9-13	75
1,600	16-20	100
2,600	25-28	150

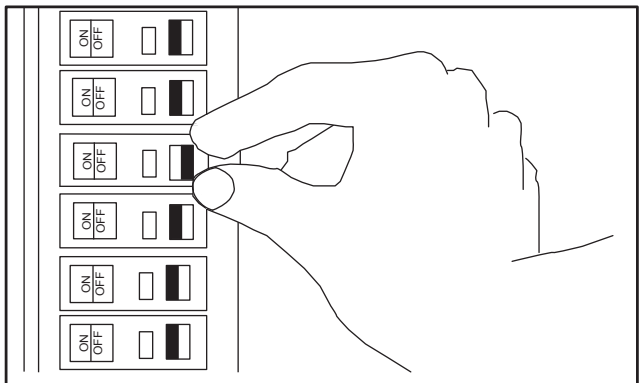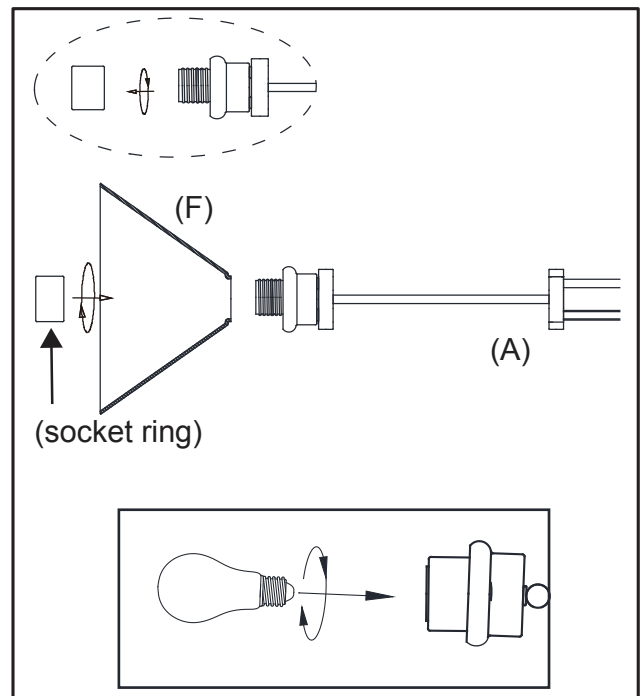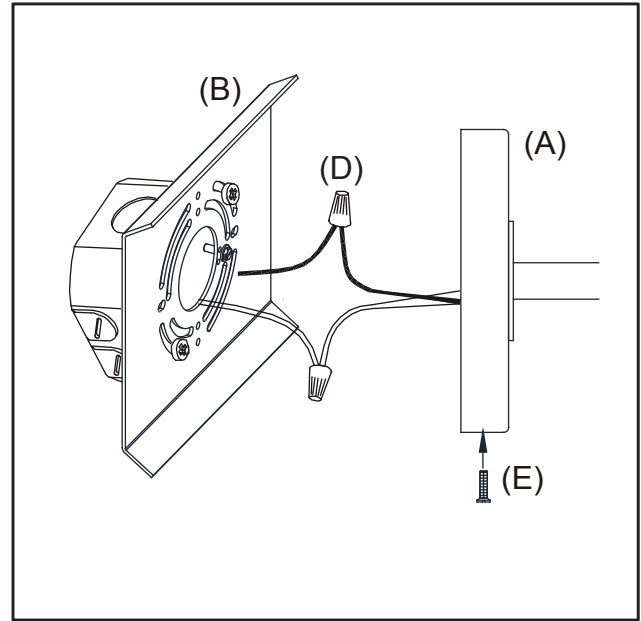

STEP 6: RESTORE POWER/TURN ON LIGHT

Cleaning & Care:

To clean, wipe the Fixture with a soft, dry cloth.
Avoid the use of harsh or abrasive chemicals as they may damage the finish