










PRODUCT NAME: Hutton Double Hutch Open

ITEM NUMBER: MO564 DBL

ASSEMBLED DIMENSIONS : 56.75"H x 32.5"W x 17"D

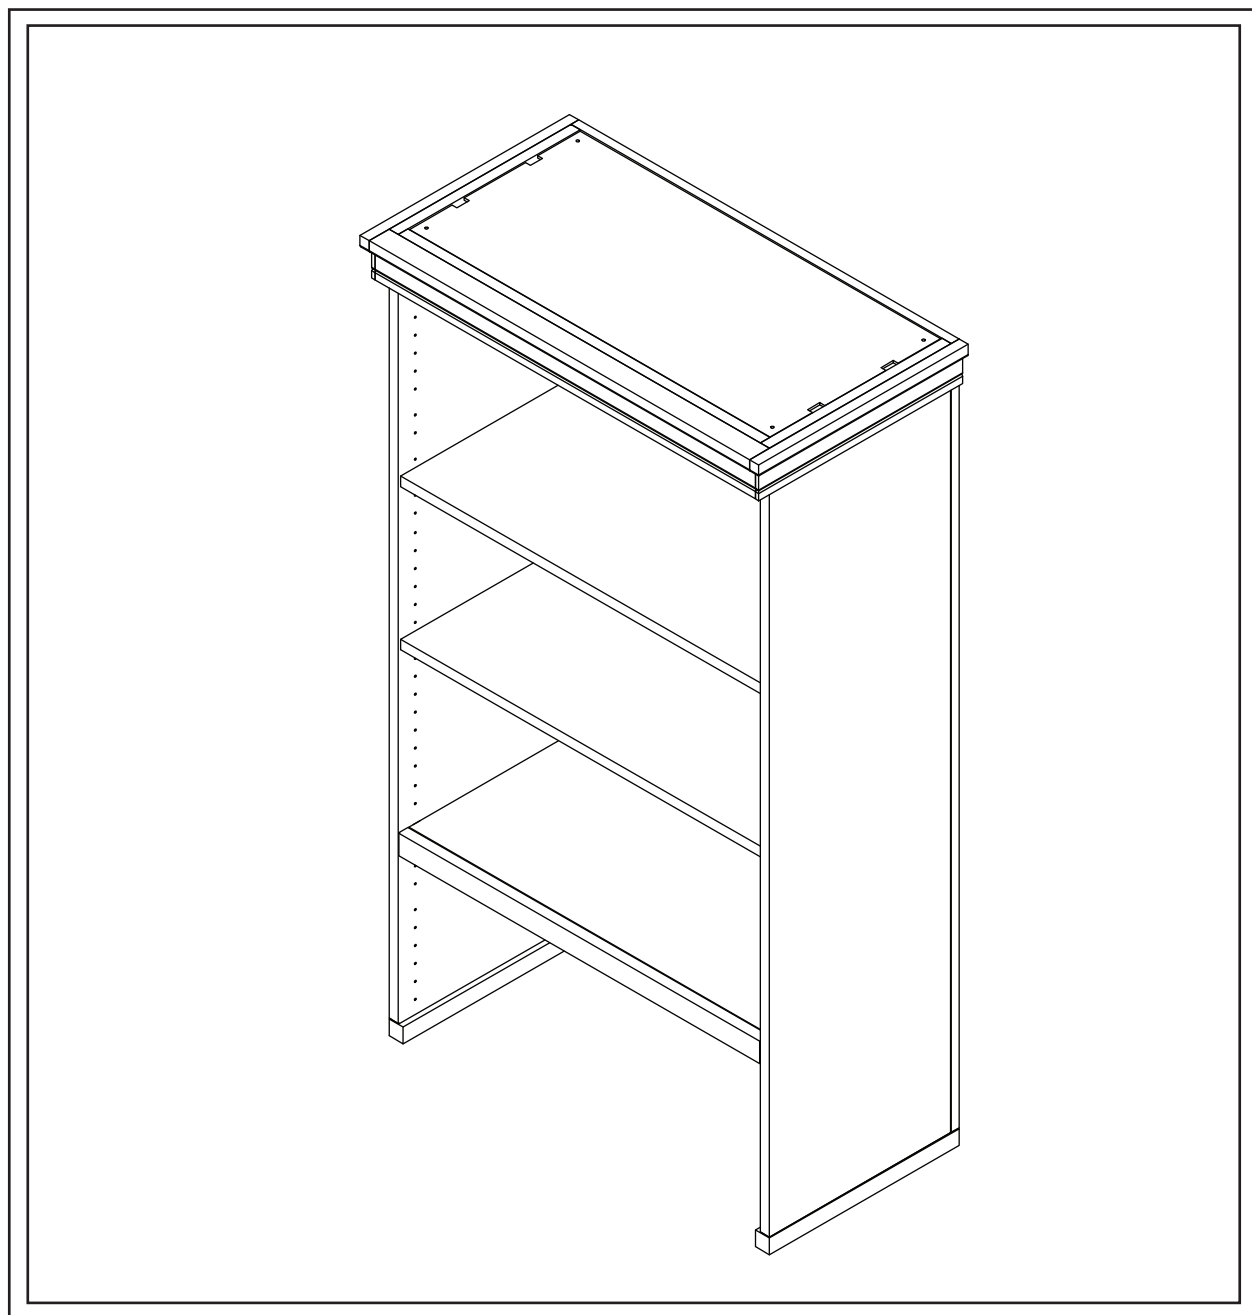

 Assemble in location for intended use.

Ltr.	Qty.	Hardware Included	
A	8		Shelf Supports
B	4		Screws
C	4		Flat Washers
D	4		Lock Washers
E	2		Connector Bracket
F	2		*Spring Clip
G	1		*Connector Plate
H	2		Wall Anchoring (Anti-tip) Kits See page 5




REQUIRED TOOLS:
Phillips Screwdriver

-Two person assembly suggested.

Remove all parts, hardware and protective packaging from carton and carefully arrange on a clean, level, padded surface.


NOTE: To avoid accidentally discarding small parts or hardware, retain all carton contents until assembly and installation are complete.

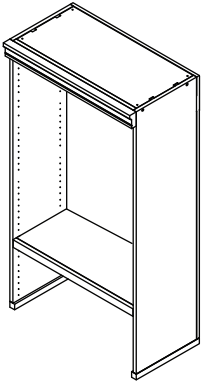


Ltr.	Qty.	Components	
I	1	 <p>Hutch (I)</p>	
J	2		 <p>Shelves (J)</p>
K	2		 <p>Left/Right Crown Molding (K)</p>

*For use when joining multiple Hutton Hutches.

STEP 1: Install Left/Right Crown Molding (K) to top sides of Hutch (I). NOTE: If joining another Hutch, delete Crown from adjoining side.

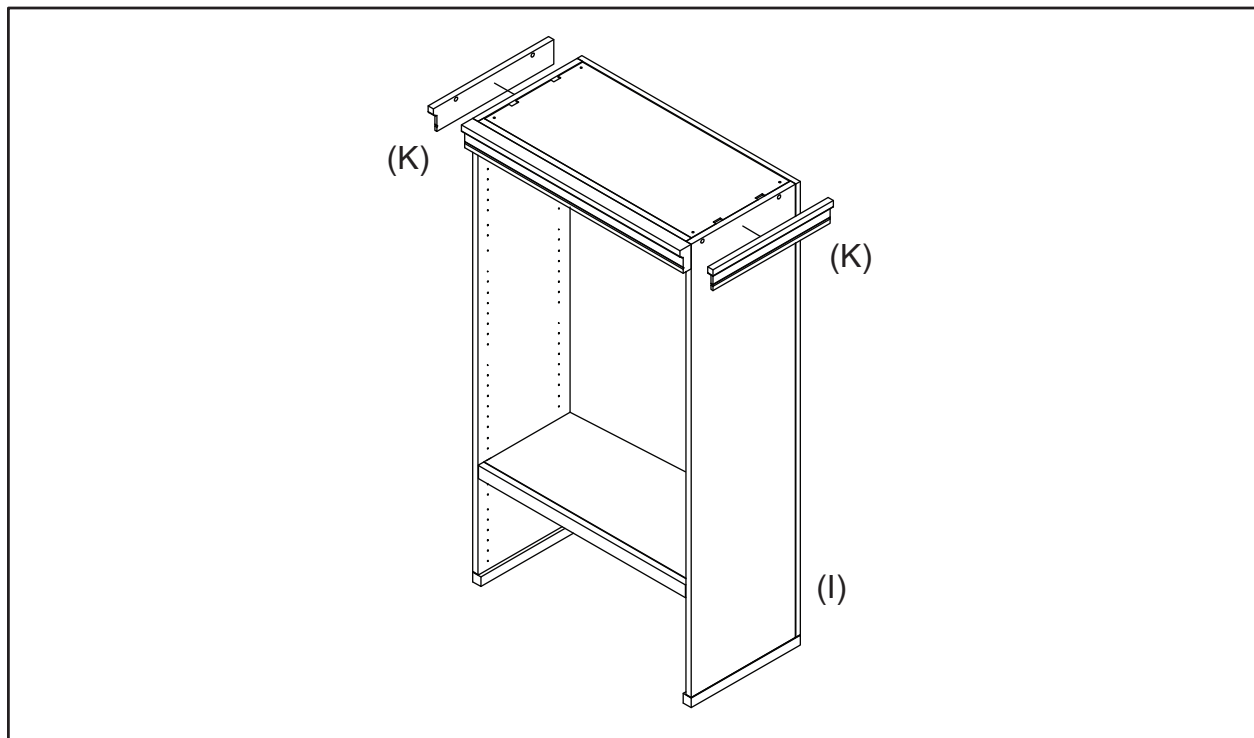


STEP 2: Determine location for each Shelf (J) then insert Shelf Supports (A) into corresponding pre-drilled holes. Carefully place each Shelf level upon Supports.
NOTE: If preferred, this Step may be postponed until Hutch has been completely installed upon Cabinets.

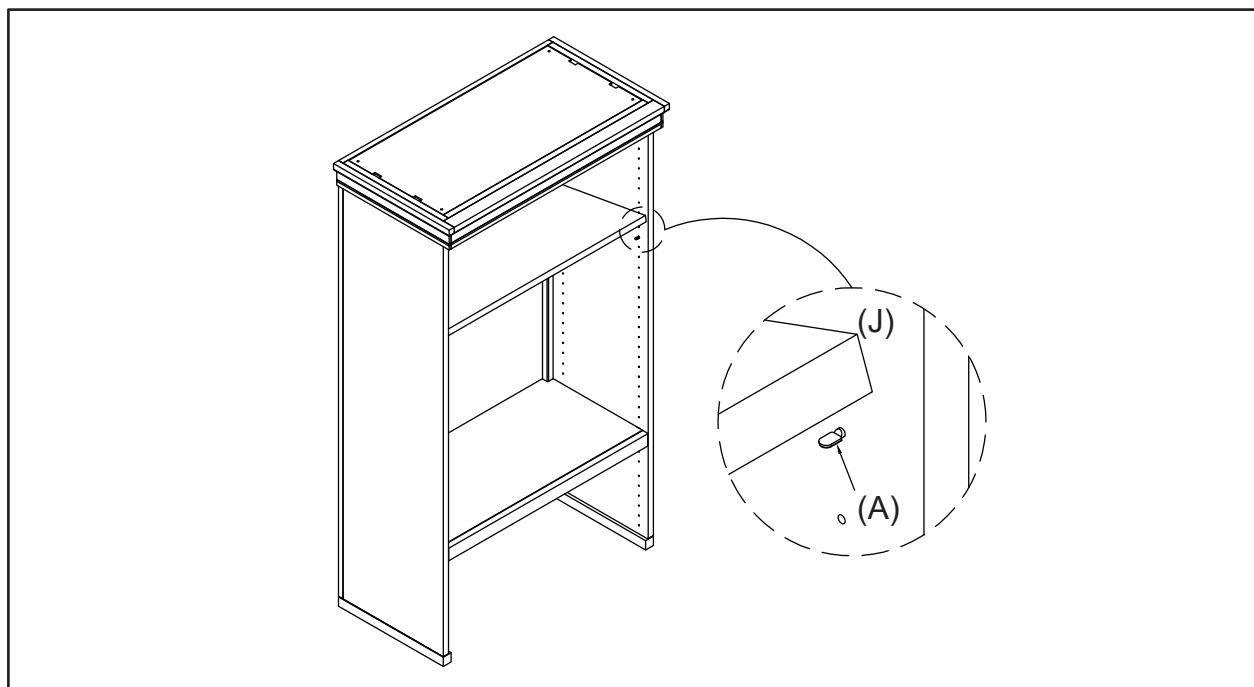

STEP 3: To install Double Hutch (I) alone onto a 2, 3, 4 or 5 unit Work Surface (sold separately), assemble Cabinets with Work Surface then carefully lift and place Hutch on top, aligning back edge as illustrated. Attach Brackets (E) using Screws (B), Flat Washers (C), and Lock Washers (D). Firmly tighten with screw-driver.




WARNING: To prevent a dangerous tip-over accident, Hutch must be secured to base using Brackets as illustrated in this step.

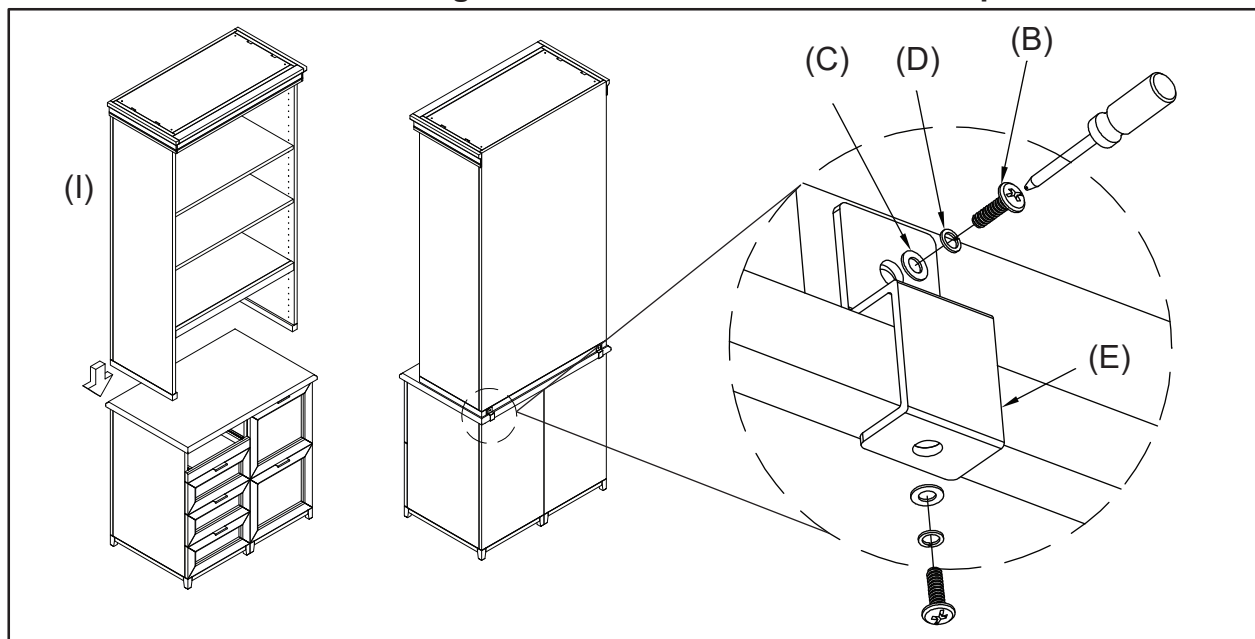





STEP 4: To install Double Hutch (I) with another Hutch (sold separately) onto a 3, 4, or 5 Unit Work Surface, attach both to Base as outlined/illustrated in Step 3 then further secure by installing Connector Plate (G) to lower back using Screws (B), Flat Washers (C) and Lock Washers (D). Finally, secure by placing both Spring Clips (F) into slots located on top side of both Hutch units.

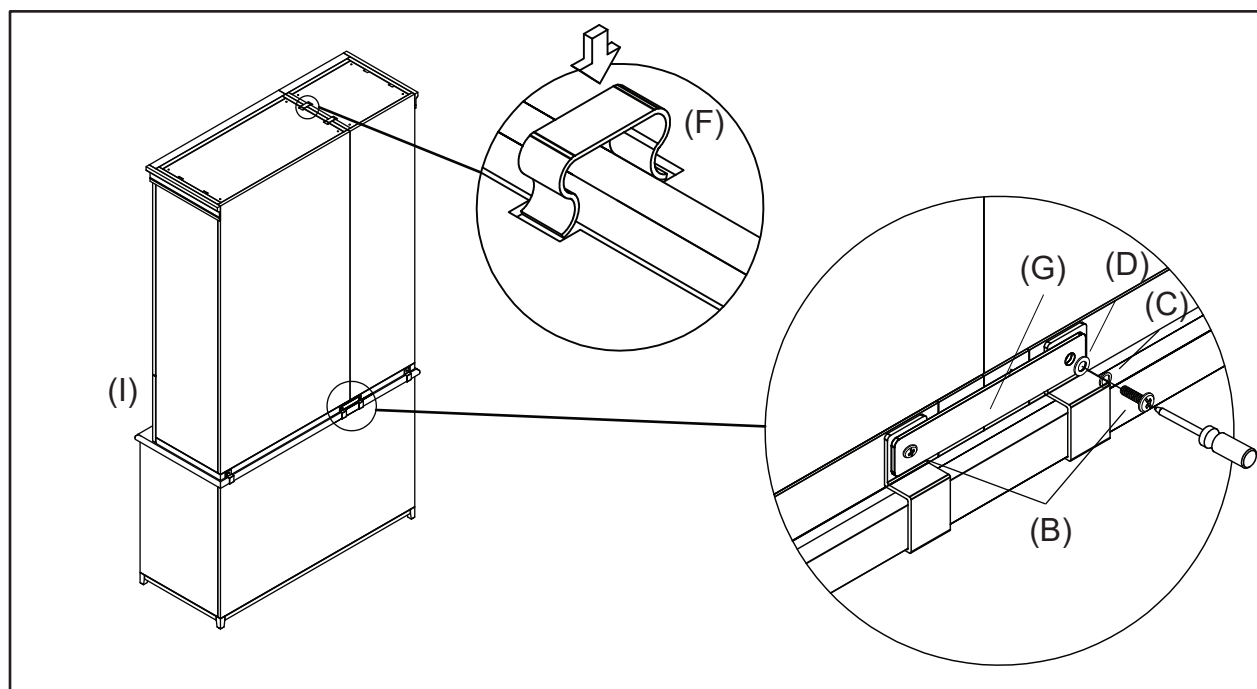

WARNING: To prevent a dangerous tip-over accident, Hutches must be secured to base using Brackets and Clips as illustrated in this step.



WALL ANCHORING HARDWARE (ANTI-TIP)

Ltr.	Qty.	Hardware Included	
A	2		Small Screw
B	2		Large Screw
C	2		Bracket
D	1		Retention Belt




WARNING

Tip-Over Hazard

Serious or fatal crushing injuries can occur from a furniture tip-over
Prevent tipping accidents. Anchor your furniture.

ATTENTION: Do not anchor Cabinet Bases to wall onto which a Hutch is to be installed.
Hutches will be anchored to wall after attachment to Cabinet Bases.

1. Place Hutch against wall at desired location then locate and mark a Wall Stud behind unit.
 2. Corresponding to Stud location, attach one Bracket (C) into WOOD BANDING on back of Hutch using Small Screws (A). If Screw is not driven into wood it may pull out during a tip-over.
- *NOTE: HUTCH MUST BE ATTACHED WITH BRACKETS TO BASE CABINET!**
3. To keep hardware out of view after installation, attach remaining Bracket (C) **INTO WALL STUD** with Large Screws (B) 2 inches below Bracket attached to back of unit.
 4. Move unit into place, align Brackets then connect both using Retention Belt (D).
 5. Confirm Belt is securely laced and locked.

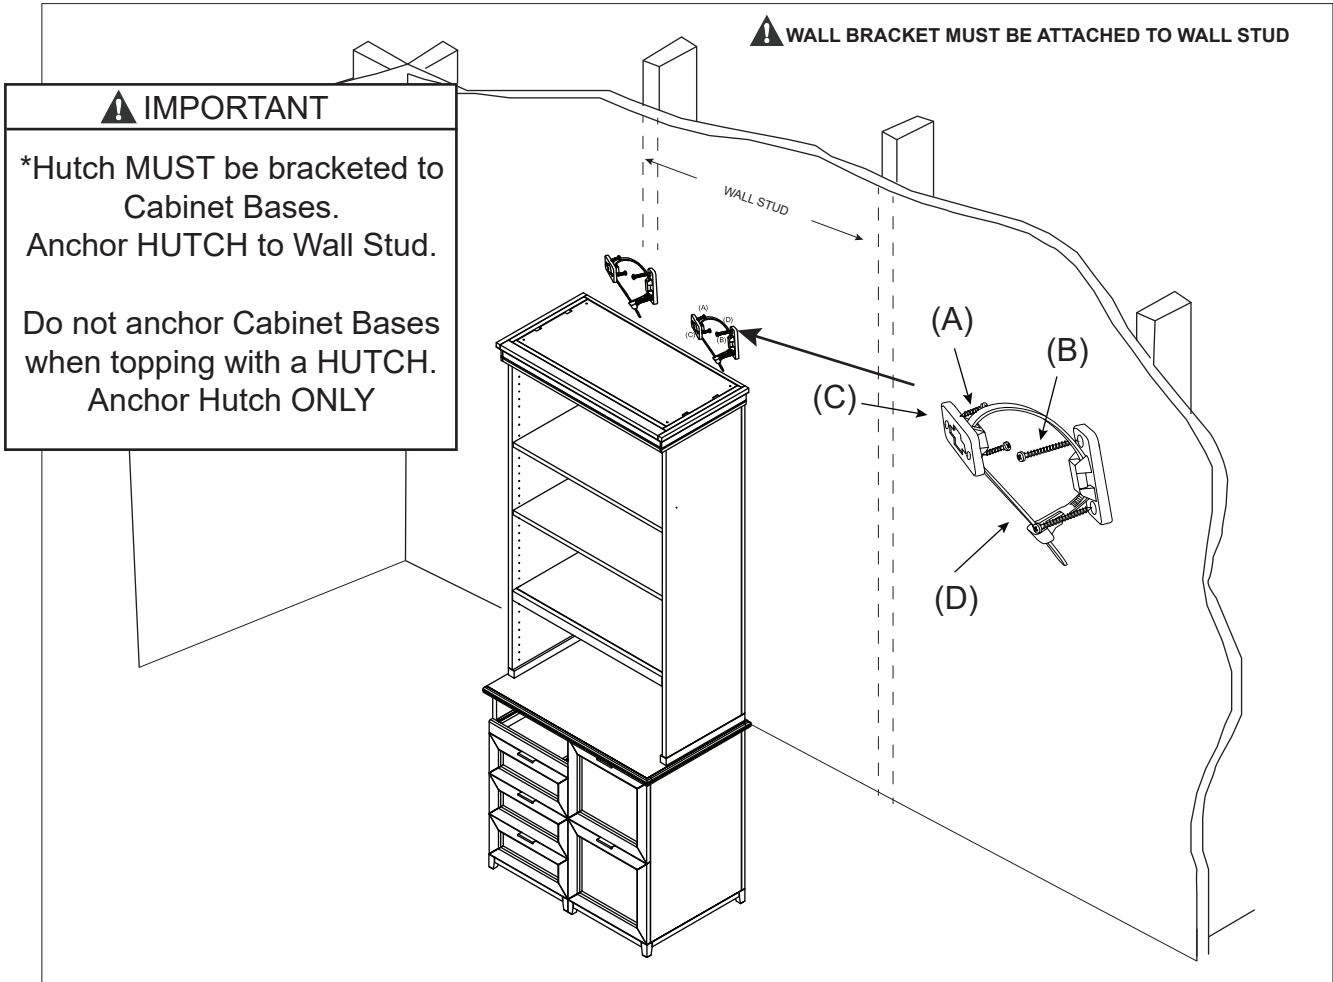

Cleaning & Care

Do not use alcohol based products or spray polisher as finish damage may result.
Periodically dust with a soft, dry cloth.