



PRODUCT NAME: Tuscan Center Bookcase with Cabinet

ITEM NUMBER: MV397

ASSEMBLED DIMENSIONS: 85 3/4"H x 37"W x 18 3/4"D

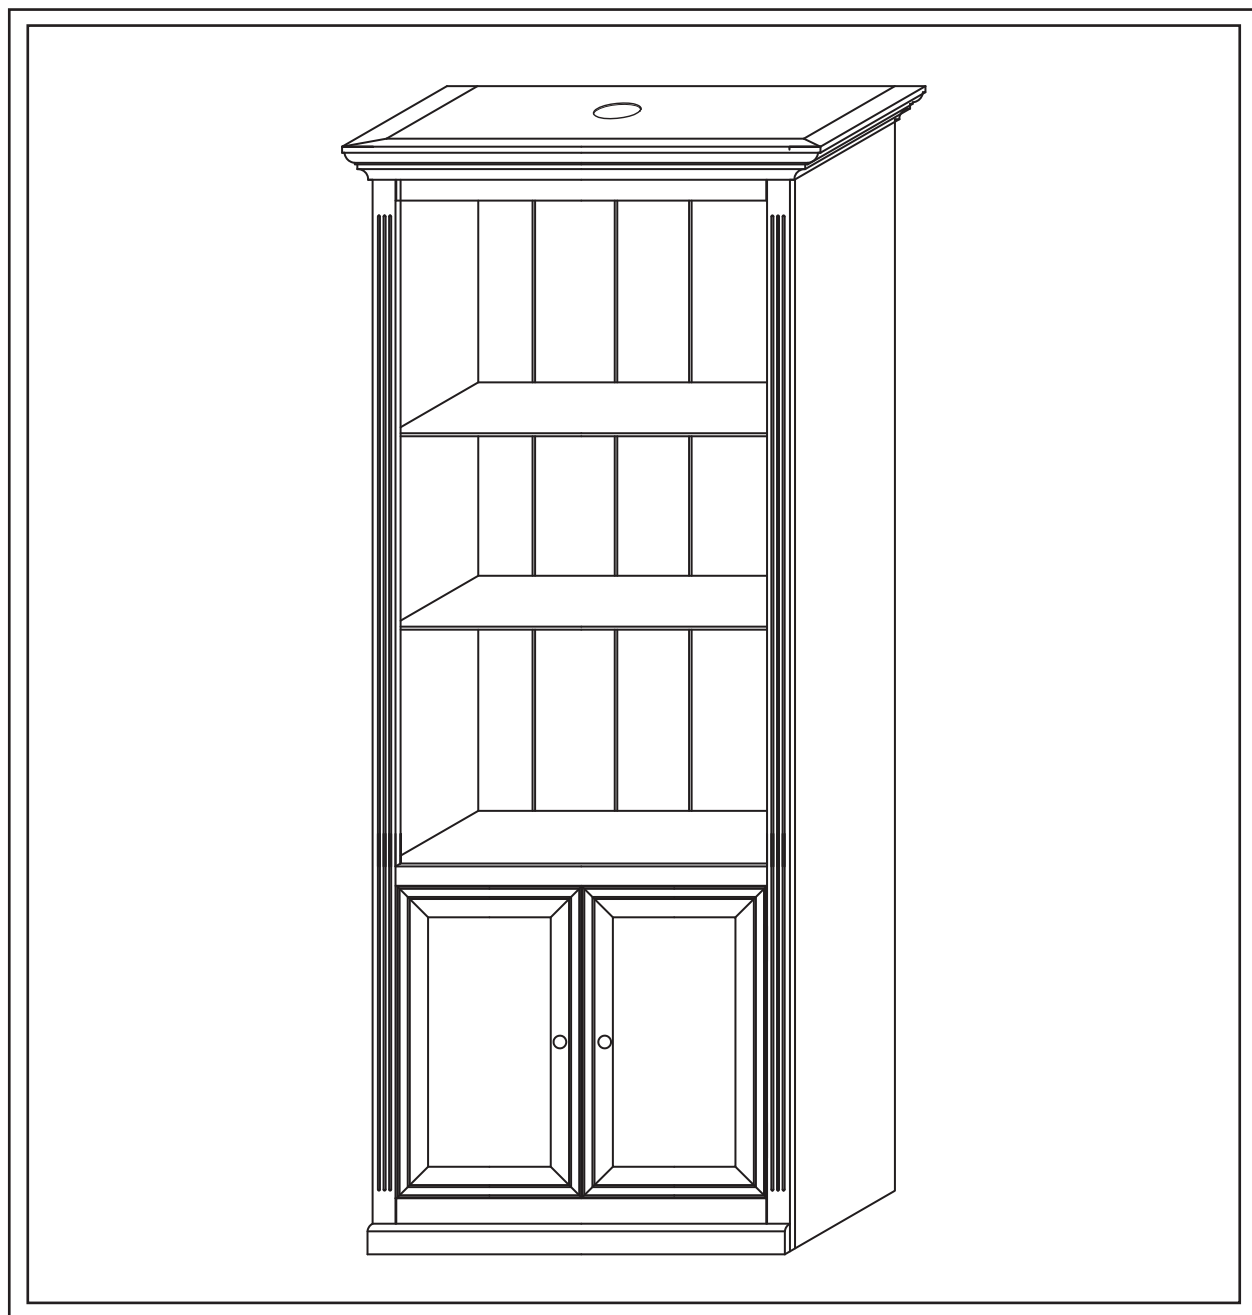

NOTE: Assemble in intended area for use.

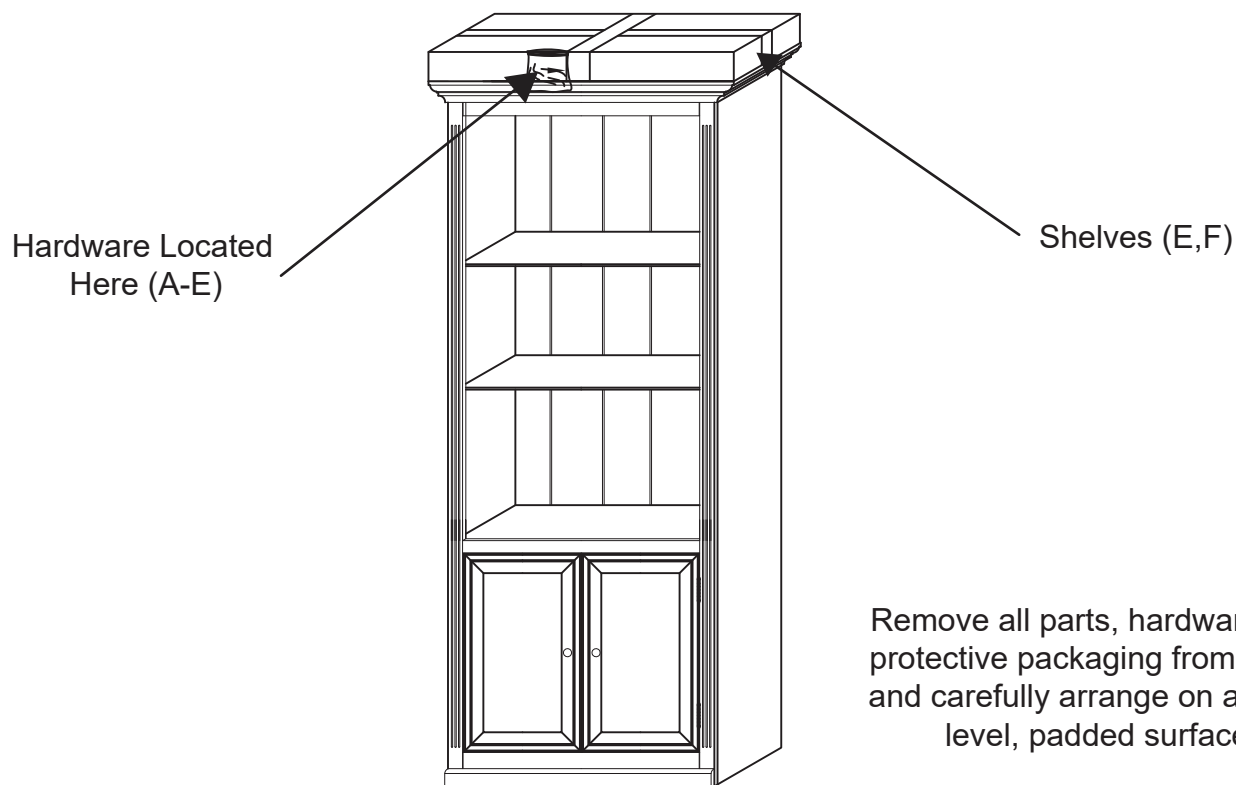







Remove all parts, hardware and protective packaging from carton and carefully arrange on a clean, level, padded surface.

REQUIRED TOOLS:

- Phillips & Flat Head screwdriver, Pencil
- Power drill (optional)
- Assembly requires 2 or more people.

NOTE: To avoid accidentally discarding small parts or hardware, retain all carton contents until assembly and installation are complete.


Ltr.	Qty.	Hardware Included	Ltr.	Qty.	Hardware Included
A	16	 Screws	D	4	 Wood Plugs
B	12	 Shelf Supports	<div style="border: 1px solid black; padding: 5px;"> <p align="center">WARNING Tip-Over Hazard WALL BRACKET MUST BE ATTACHED TO WALL STUD Prevent tipping accidents. Anchor your furniture. Serious or fatal crushing injuries can occur from a furniture tip-over</p> </div>		
C	2	 L-Brackets			

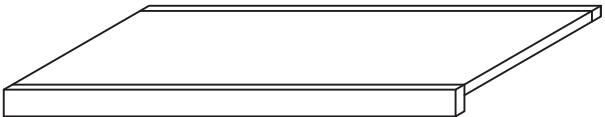Ltr.	Qty.	Components
E	1	 Wood Shelf (E)
F	2	 Glass Shelves (F)

NOTE: Assemble in intended area for use.


STEP 1: INSTALL SHELVES

Determine shelf height, then insert Shelf Supports (B) into pre-drilled holes. Gently lay in Wood Shelf (E) then Glass Shelves (F). All should rest level upon each Shelf Support.

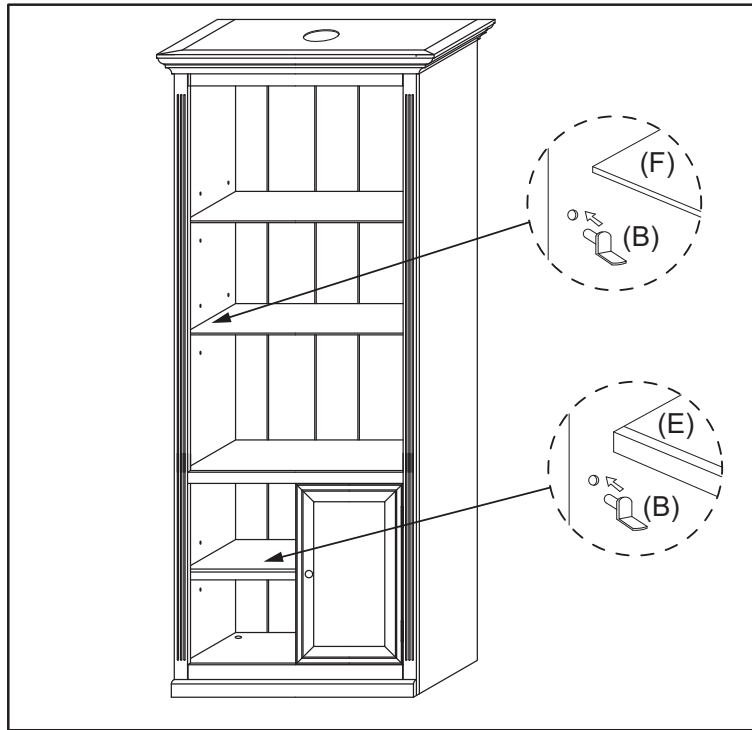


STEP 2: LEVELERS

If necessary, the Bookcase may be leveled by adjusting LEVELERS located on the bottom of each corner which are accessible INSIDE the Cabinet. Use a Flat Head Screwdriver to turn clockwise/counterclockwise to adjust. Cover holes with Wood Plugs (D) when complete.

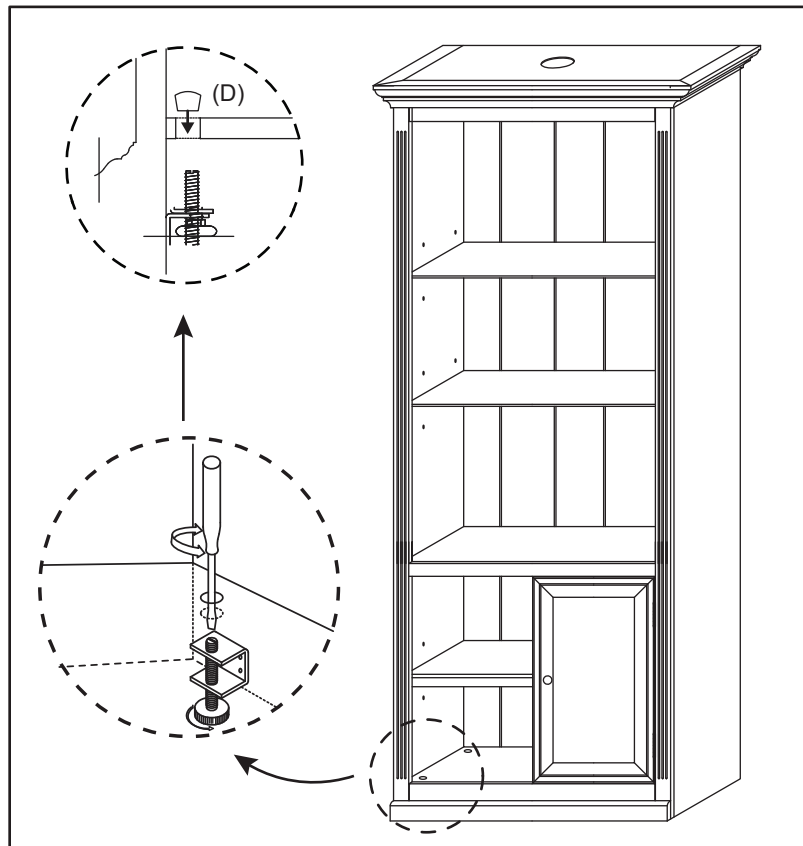

STEP 3: LOCATE AND MARK WALL STUDS FOR ANTI-TIP HARDWARE


Bookcase includes two L-Brackets (C), at least one of which **MUST BE SECURED TO A WALL STUD**. First, push Bookcase against wall and position over wall stud(s). Use a pencil to mark stud locations.

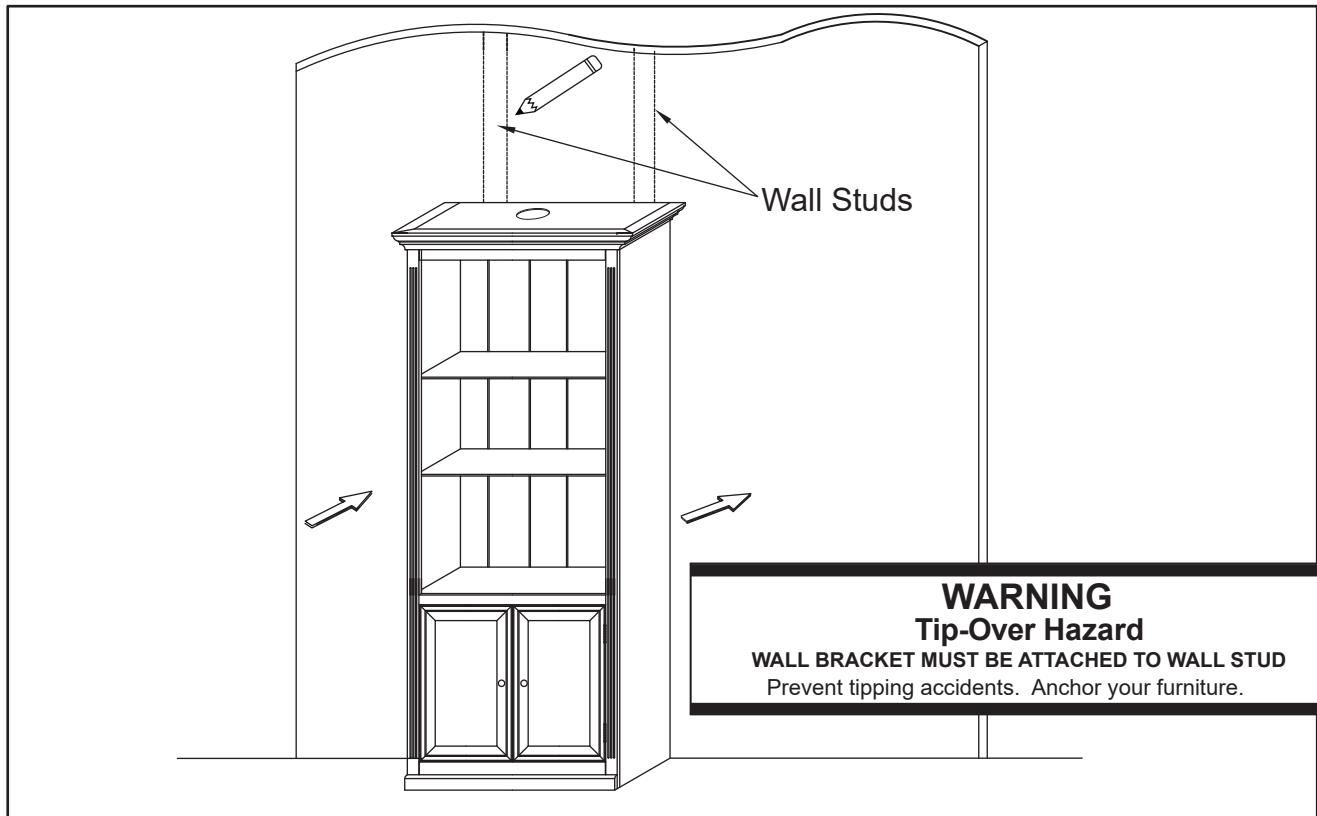

STEP 4: MARK LOCATION OF WALL BRACKETS


With Bookcase against the wall, slide L-Brackets (C) over top corner and position at Wall Stud(s). Use pencil to mark wall at top of Wall Bracket.

NOTE: In order to hide wall brackets, orient as shown below.

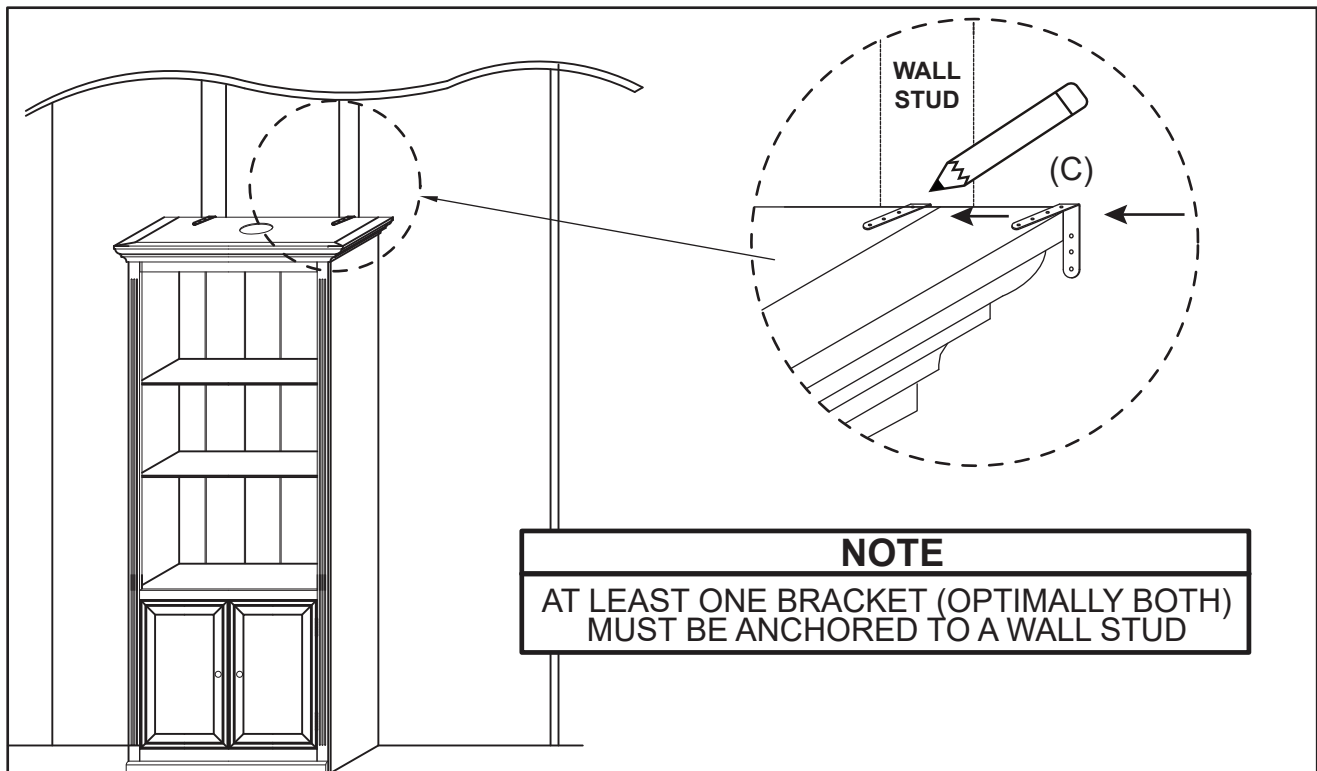

STEP 5: ATTACH BRACKETS TO WALL


Carefully pull Bookcase away from wall and attach Wall Brackets (C) at marked locations. Use Screws (A) for anchoring and securing Bracket to a Wall Stud.

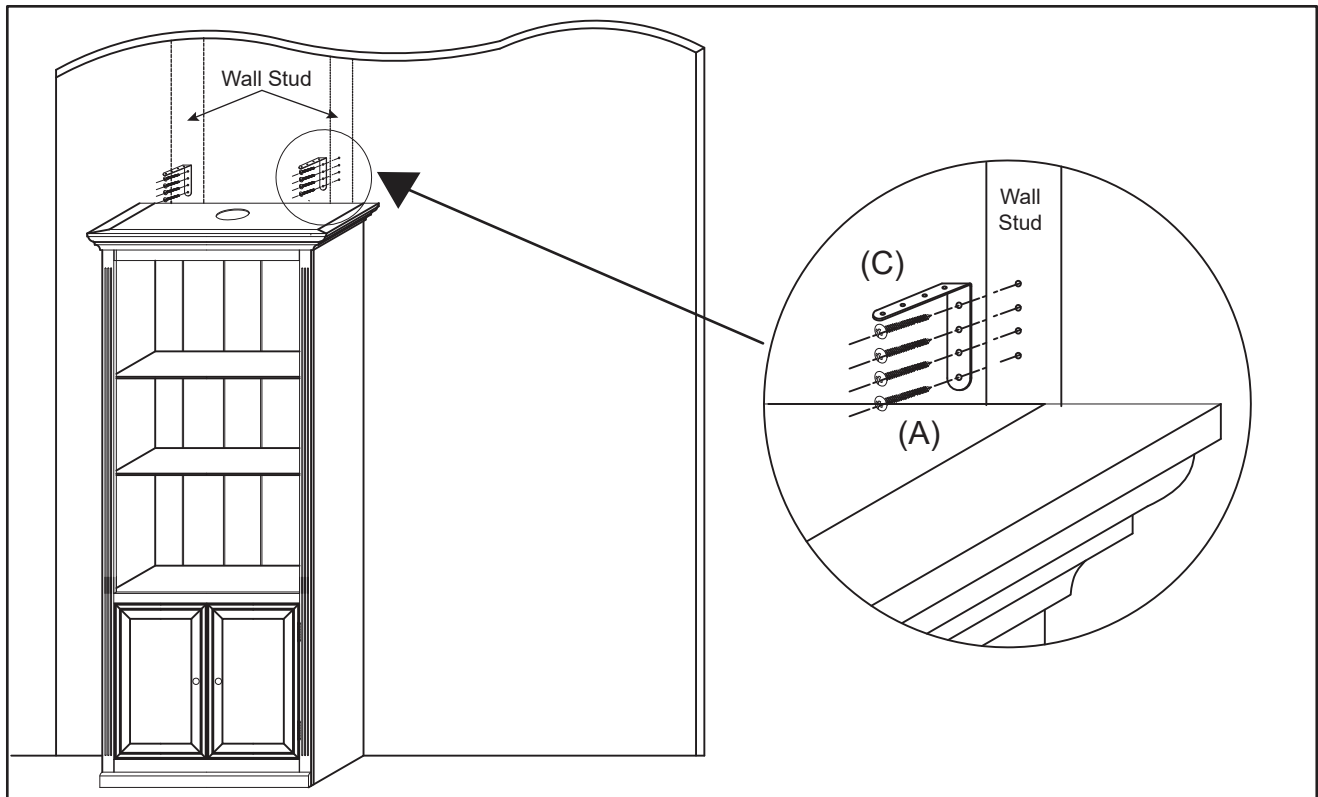

STEP 6: ATTACH BRACKETS TO TOP OF BOOKCASE


Carefully slide Bookcase under each of the previously installed L-Brackets (C) and use two or more Screws (A) to attach L-Brackets to top of Bookcase.

NOTE: Your wall base molding may prevent Bookcase from going back far enough for Bracket to entirely cover top. Use screws only in those holes that cover.

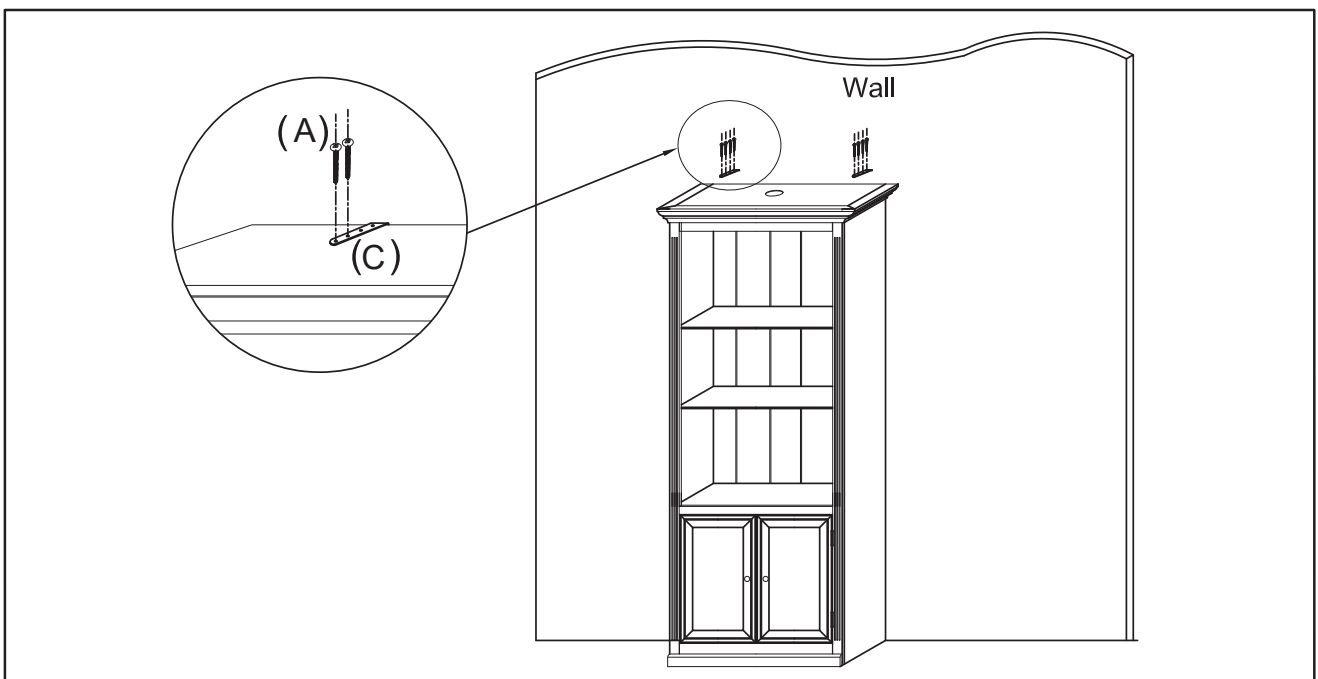

STEP 7: BOOKCASE LIGHTING

Plug electrical cord into an outlet. Cabinet is equipped with an “Easy Touch” dimmer control which allows for three levels of brightness. To operate, touch upper right steel plate.

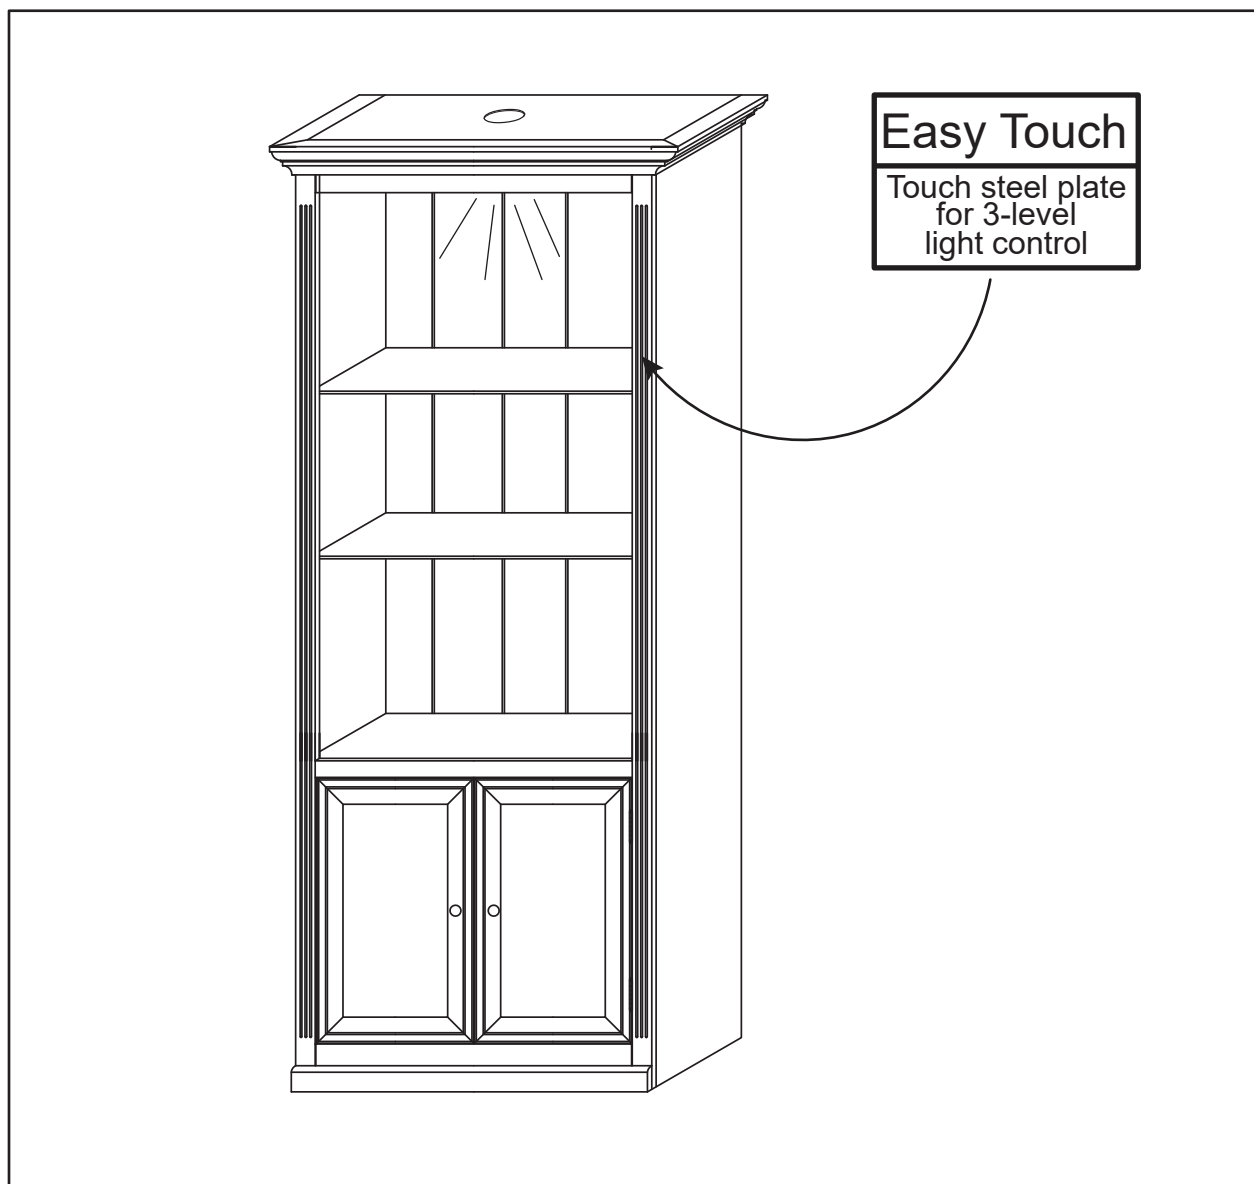


Cleaning & Care:


DO NOT use alcohol based products or spray polisher as they can damage the finish. Dust with soft cloth. Finish can be affected by heat or extended contact with oils or wine.

NOTE: Save this page for future bulb replacement.

HALOGEN BULB REPLACEMENT:

Qty.	Item needed
1	 Halogen JCD G8 120V 25W Replacement Bulb (A) NOT INCLUDED

Unplug the unit from the wall. Remove the Lens Cover (B) from the Fixture Body (C) by turning it counter clockwise and pulling it away from the unit. Remove the old Bulb (A) by pulling it straight out in a horizontal direction.

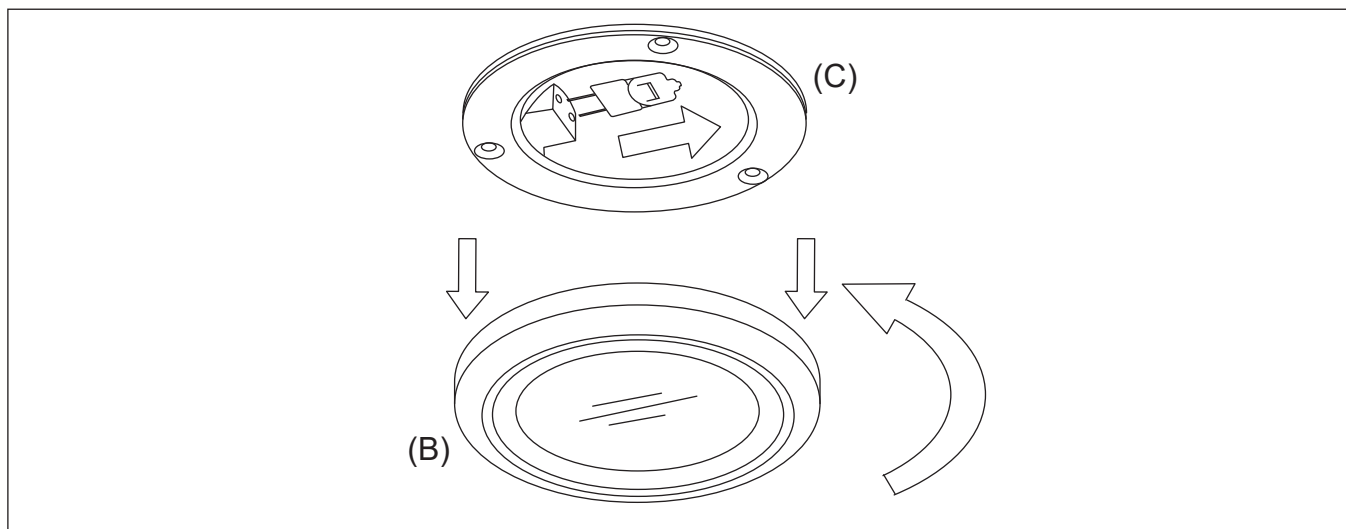

Insert the new Bulb (A) into the Fixture Body (C) Socket using a tissue or soft cloth (oil from the skin may damage the bulb). Replace the Lens Cover (B) by twisting it clockwise back into place.

